



FEATURES:

- AEC-Q200 certified/qualified
- Capacitance range: 0.1pF to 10uF
- Voltage range: 10V to 3000V DC
- Terminations: 100% matte Tin (Sn)
- 3mm minimum bending strength specification



PART NUMBER STRUCTURE


AGC Series	1206 Size	X7R Temperature Characteristic (Dielectric)	500 Rated Voltage	- 473 Capacitance (picofarads)	K Tolerance	N Termination	P Packaging
	0201 0402 0603 0805 1206 1210 1812 1825 2220 2225	COG/NPO X7R	1st two digits are significant followed by number of zeroes. 100 = 10 VDC 160 = 16 VDC 250 = 25 VDC 500 = 50 VDC 101 = 100 VDC 201 = 200 VDC 251 = 250 VDC 501 = 500 VDC 631 = 630 VDC 102 = 1000 VDC 202 = 2000 VDC 302 = 3000 VDC	1st two digits are significant, followed by number of zeroes. R denotes decimal e.g: 101 = 100pF 104 = 100nF 6R8 = 6.8pF	* A = ±0.05pF * B = ±0.1pF * C = ±0.25pF * D = ±0.5pF F ±1% G = ±2% J = ±5% K = ±10% M = ±20% * For values below 10pF only.	N = 100% Matte Tin over Nickel over a conductive Polymer X = Soft/Flex termination (5mm)	E = Embossed Tape (7" reel) U = Embossed Tape (13" reel) P = Paper Tape (7" reel) R = Paper Tape (13" reel)

Example P/N: AGC1206X7R500-473KNP

Standard termination finish is 100% matte Tin (Sn) over Nickel.

DIMENSIONS


Unit: inches (mm)

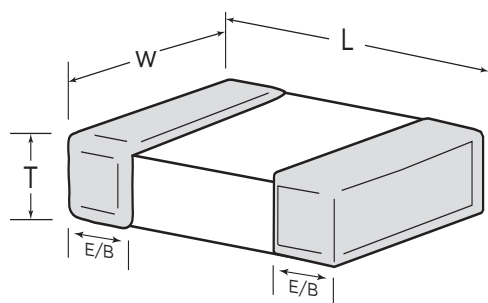

SIZE	L	W	E/B	T
0201	0.024 ± 0.001 (0.60 ± 0.03)	0.012 ± 0.001 (0.30 ± 0.03)	0.006 ± 0.002 (0.15 ± 0.05)	
0402	0.039 ± 0.002 (1.00 ± 0.05)	0.020 ± 0.002 (0.5 ± 0.05)	0.010 +0.002/-0.004 (0.25 +0.05/-0.10)	
0603	0.063 ± 0.004 (1.6 ± 0.10)	0.031 ± 0.004 (0.8 ± 0.10)	0.016 ± 0.006 (0.40 ± 0.15)	
	0.063 + 0.006/-0.004 (1.6 +0.15/-0.10)	0.031 + 0.006/-0.004 (0.8 + 0.15/-0.10)		
0805	0.079 ± 0.006 (2.0 ± 0.15)	0.049 ± 0.004 (1.25 ± 0.10)	0.020 ± 0.008 (0.50 ± 0.20)	
	0.079 ± 0.008 (2.0 ± 0.20)	0.049 ± 0.008 (1.25 ± 0.20)		
1206	0.126 ± 0.006 (3.2 ± 0.15)	0.063 ± 0.006 (1.6 ± 0.15)	0.024 ± 0.008 (0.60 ± 0.20)	
	0.126 ± 0.008 (3.2 ± 0.20)			0.063 ± 0.008 (1.6 ± 0.20)
	0.126 + 0.012/-0.004 (3.2 + 0.30/-0.10)	0.063 + 0.012/-0.004 (1.60 + 0.30/-0.10)		
1210	0.126 ± 0.012 (3.2 ± 0.30)	0.098 ± 0.008 (2.5 ± 0.20)	0.030 ± 0.010 (0.75 ± 0.25)	
	0.126 ± 0.016 (3.2 ± 0.40)	0.098 ± 0.012 (2.5 ± 0.30)		
1812	0.181 ± 0.012 (4.60 ± 0.30)	0.126 ± 0.012 (3.20 ± 0.30)	0.012 (0.30)	
1825	0.181 ± 0.012 (4.60 ± 0.30)	0.250 ± 0.016 (6.35 ± 0.40)	0.012 (0.30)	
2220	0.224 ± 0.016 (5.70 ± 0.40)	0.197 ± 0.016 (5.00 ± 0.40)	0.012 (0.30)	
2225	0.224 ± 0.016 (5.70 ± 0.40)	0.250 ± 0.016 (6.35 ± 0.40)	0.012 (0.30)	

Refer to pages 3-13 for item specific thickness

STRUCTURE

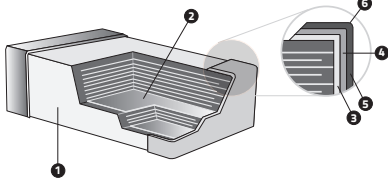


1	Ceramic Body (dielectric)	4	Silver Polymer
2	Inner Electrode	5	Nickel Plating
3	Inner Termination	6	100% Matte Tin (Sn)

ELECTRICAL SPECIFICATION & RANGE

COG/NPO

Typical Capacitance Change vs. Temperature

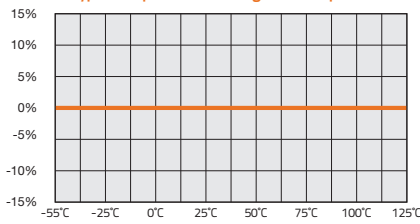

Operating Temperature Range:
-55°C to +125°C

Temperature Coefficient:
0 ±30PPM/°C

Temperature Voltage Coefficient:
0 ±30PPM/°C

Insulation Resistance:
>1000Ω-F or 100GΩ, for values ≤ 0.047μF
(whichever is less at 25°C, VDCV).
For Capacitance values > 0.047μF, the 500 Ω-F rule applies.
(The IR at 125°C is 10% of the value at 25°C)

Ageing: None


Withstanding Voltage: >2.5 times VDCW

Capacitance Tolerance: A,B,C,D,F,G,J,K

Dissipation Factor: 0.1% max

X7R

Typical Capacitance Change vs. Temperature

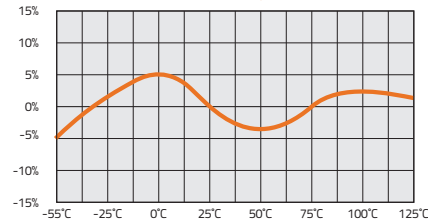

Operating Temperature Range:
-55°C to +125°C

Temperature Coefficient:
0 ±15%Δ°C MAX.

Temperature Voltage Coefficient:
X7R not applicable

Insulation Resistance:
>100Ω-F or 1GΩ, whichever is less
at 25°C, VDCW. (10,000Ω at 125°C)

Ageing:
2.5% per decade hour, typical

Withstanding Voltage:
>2.5 times VDCW

Capacitance Tolerance:
J,K,M

Rated Voltage	Insulation Resistance
100V: All X7R; 1210≥3.3μF	1GΩ or 100Ω-F Whichever is smaller
50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	
35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	
25V: 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	
16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	
10V: 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	

Rated Voltage	D.F.≤	Exception of D.F.≤
≥100V	≤2.5%	≤3% 1206≥0.47μF
		≤5% 0805>0.1μF; 0603≥0.068μF; 1206>1μF; 1210≥2.2μF
		≤10% 0805>0.22μF; 1210≥3.3μF
50V	≤2.5%	≤3% 0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF
		≤5% 0201≥0.01μF; 1210≥4.7μF
		≤10% 0402≥0.012μF; 0603>0.1μF; 0805≥1μF; 1206≥2.2μF; 1210≥10μF
35V	≤3.5%	≤10% 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF
25V	≤3.5%	≤5% 0201≥0.01μF; 0805≥1μF; 1210≥10μF
		≤7% 0603≥0.33μF
		≤10% 0201≥0.01μF; 0402≥0.10μF & (0402/X7R≥0.056μF); 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF
		≤12.5% 0402≥0.47μF
16V	≤3.5%	≤5% 0201≥0.01μF; 0402≥0.33μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF
		≤10% 0201≥0.01μF; (0201/X7R≥0.022μF); 0402≥0.22μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF
10V	≤5%	≤10% 0201≥0.012μF; 0402≥0.33μF(0402/X7R≥0.22μF); 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF; 01R5
		≤15% 201≥0.1μF; 0402≥1μF

VOLTAGE AND CAPACITANCE RANGE

COG (NPO) DIELECTRIC (0201 - 0402)

Values that are typically available. (Thickness in mm).

Size (inches)		0201					0402					
VDCW (MAX)		10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	
CAPACITANCE CODE	OR1	0.1pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	OR2	0.2pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	OR3	0.3pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	OR4	0.4pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	OR5	0.5pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	OR6	0.6pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	OR7	0.7pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	OR8	0.8pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	OR9	0.9pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	1R0	1.0pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	1R2	1.2pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	1R5	1.5pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	1R8	1.8pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	2R2	2.2pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	2R7	2.7pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	3R3	3.3pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	3R9	3.9pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	4R7	4.7pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	5R6	5.6pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	6R8	6.8pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	8R2	8.2pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	100	10pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	120	12pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	150	15pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	180	18pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	220	22pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	270	27pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	330	33pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	390	39pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	470	47pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	560	56pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	680	68pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03		0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
	820	82pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03		0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
101	100pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03		0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	
121	120pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03		0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	
151	150pF						0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	
181	180pF						0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	
221	220pF						0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05	
271	270pF						0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05		
331	330pF						0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05		
391	390pF						0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05		
471	470pF						0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05		
561	560pF						0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05		
681	680pF						0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05		
821	820pF						0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05		
102	1000pF						0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05		
122	1200pF											
152	1500pF											
182	1800pF											
222	2200pF											
272	2700pF											
332	3300pF											

Note: Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

VOLTAGE AND CAPACITANCE RANGE

COG (NPO) DIELECTRIC (0603)

Values that are typically available. (Thickness in mm).

Size (inches)		0603						
VDCW (MAX)		10V	16V	25V	50V	100V	200V	250V
OR1	0.1pF							
OR2	0.2pF							
OR3	0.3pF							
OR4	0.4pF							
OR5	0.5pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
OR6	0.6pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
OR7	0.7pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
OR8	0.8pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
OR9	0.9pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
1R0	1.0pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
1R2	1.2pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
1R5	1.5pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
1R8	1.8pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
2R2	2.2pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
2R7	2.7pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
3R3	3.3pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
3R9	3.9pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
4R7	4.7pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
5R6	5.6pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
6R8	6.8pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
8R2	8.2pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
100	10pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
120	12pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
150	15pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
180	18pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
220	22pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
270	27pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
330	33pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
390	39pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
470	47pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
560	56pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
680	68pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
820	82pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
101	100pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
121	120pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
151	150pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
181	180pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
221	220pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07
271	270pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80+0.15/-0.10	0.80+0.15/-0.10
331	330pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80+0.15/-0.10	0.80+0.15/-0.10
391	390pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80+0.15/-0.10	0.80+0.15/-0.10
471	470pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80+0.15/-0.10	0.80+0.15/-0.10
561	560pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80+0.15/-0.10	0.80+0.15/-0.10
681	680pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80+0.15/-0.10	0.80+0.15/-0.10
821	820pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80+0.15/-0.10	0.80+0.15/-0.10
102	1000pF	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07	0.80±0.07		
122	1200pF	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10		
152	1500pF	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10		
182	1800pF	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10		
222	2200pF	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10			
272	2700pF	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10			
332	3300pF	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10			

Note: Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

VOLTAGE AND CAPACITANCE RANGE

COG (NPO) DIELECTRIC (0805)

Values that are typically available. (Thickness in mm).

SIZE (INCHES)		0805									
VDCW (MAX)		10V	16V	25V	50V	100V	200V	250V	500V	630V	
CAPACITANCE CODE	OR5	0.5pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	OR6	0.6pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	OR7	0.7pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	OR8	0.8pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	OR9	0.9pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	1R0	1.0pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	1R2	1.2pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	1R5	1.5pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	1R8	1.8pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	2R2	2.2pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	2R7	2.7pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	3R3	3.3pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	3R9	3.9pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	4R7	4.7pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	5R6	5.6pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	6R8	6.8pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	8R2	8.2pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	100	10pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	120	12pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	150	15pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	180	18pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	220	22pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	270	27pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	330	33pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	390	39pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	470	47pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	560	56pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	680	68pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10
	820	82pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.80±0.10	0.80±0.10
	101	100pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
	121	120pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10
	151	150pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10
	181	180pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10
221	220pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
271	270pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
331	330pF	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	0.60±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
391	390pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
471	470pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.20	1.25±0.20	
561	560pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.20	1.25±0.20	
681	680pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.20	1.25±0.20	
821	820pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.20	1.25±0.20	
102	1000pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.20	1.25±0.20	
122	1200pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.20	1.25±0.20	
152	1500pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.20	1.25±0.20	
182	1800pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.20	1.25±0.20	
222	2200pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.20	1.25±0.20	
272	2700pF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.20	1.25±0.20			
332	3300pF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.20	1.25±0.20			
392	3900pF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.20	1.25±0.20			
472	4700pF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.20	1.25±0.20			
562	5600pF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10					
682	6800pF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10					
822	8200pF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10					
103	0.010uF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10					
123	0.012uF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10					
153	0.015uF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10					
183	0.018uF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10					
223	0.022uF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10					

Note: Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

VOLTAGE AND CAPACITANCE RANGE

COG (NPO) DIELECTRIC (1206)

Values that are typically available. (Thickness in mm).

SIZE (INCHES)		1206									
VDCW (MAX)		10V	16V	25V	50V	100V	200V	250V	500V	630V	1000V
1R0	1.0pF										
1R2	1.2pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	
1R5	1.5pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
1R8	1.8pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
2R2	2.2pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
2R7	2.7pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
3R3	3.3pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
3R9	3.9pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
4R7	4.7pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
5R6	5.6pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
6R8	6.8pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
8R2	8.2pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
100	10pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
120	12pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
150	15pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
180	18pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10
220	22pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10
270	27pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10
330	33pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10
390	39pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10
470	47pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10
560	56pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10
680	68pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10
820	82pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10
101	100pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10
121	120pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10
151	150pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10
181	180pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.60±0.20
221	220pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.60±0.20
271	270pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20
331	330pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20
391	390pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20
471	470pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20
561	560pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.95±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.60±0.20
681	680pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.95±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.60±0.20
821	820pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.95±0.10	1.60±0.20	1.60±0.20	1.60±0.20	1.60±0.20
102	1000pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.95±0.10	1.60±0.20	1.60±0.20	1.60±0.20	1.60±0.20
122	1200pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.95±0.10	1.60±0.20	1.60±0.20	1.60±0.20	
152	1500pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.60±0.20	1.60±0.20	1.60±0.20	
182	1800pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.60±0.20	1.60±0.20	1.60±0.20	
222	2200pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.60±0.20	1.60±0.20	1.60±0.20	
272	2700pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.60±0.20	1.60±0.20	1.60±0.20	
332	3300pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.60±0.20	1.60±0.20	1.60±0.20	
392	3900pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.60±0.20	1.60±0.20	1.60±0.20	
472	4700pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.60±0.20	1.60±0.20	1.60±0.20	
562	5600pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.60±0.20	1.60±0.20	1.60±0.20	1.60±0.20	
682	6800pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20	1.60±0.20	1.60±0.20	1.60±0.20	
822	8200pF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.60±0.20	1.60±0.20	1.60±0.20	1.60±0.20	
103	0.010uF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.60±0.20	1.60±0.20	1.60±0.20	1.60±0.20	

Note: Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

VOLTAGE AND CAPACITANCE RANGE

COG (NPO) DIELECTRIC (1210)

Values that are typically available. (Thickness in mm).

SIZE (INCHES)		1210										
VDCW (MAX)		10V	16V	25V	50V	100V	200V	250V	500V	630V	1000V	
CAPACITANCE CODE ->	100	10pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10
	120	12pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10
	150	15pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10
	180	18pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10
	220	22pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10
	270	27pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10
	330	33pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10
	390	39pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10
	470	47pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10
	560	56pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10
	680	68pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10
	820	82pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10
	101	100pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10
	121	120pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10
	151	150pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10
	181	180pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10
	221	220pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20
	271	270pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20
	331	330pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20
	391	390pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20
	471	470pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20
	561	560pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20
	681	680pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20
	821	820pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20
	102	1000pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.60±0.20
	122	1200pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	2.00±0.20
	152	1500pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	2.00±0.20
	182	1800pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	2.00±0.20
	222	2200pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	2.00±0.20
	272	2700pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	2.00±0.20
	332	3300pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	2.00±0.20
	392	3900pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	2.00±0.20
	472	4700pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20	1.60±0.20	1.60±0.20	1.60±0.20	2.00±0.20
	562	5600pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20	1.60±0.20	1.60±0.20	1.60±0.20	2.00±0.20
	682	6800pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20	1.60±0.20	1.60±0.20	1.60±0.20	2.00±0.20
	822	8200pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20	1.60±0.20	1.60±0.20	1.60±0.20	2.00±0.20
	103	0.010µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20	1.60±0.20	2.00±0.20	2.00±0.20	2.50±0.30
	123	0.012µF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	2.00±0.20	2.00±0.20	2.50±0.30	2.50±0.30	2.50±0.30
	153	0.015µF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	2.00±0.20	2.00±0.20	2.50±0.30	2.50±0.30	2.50±0.30
	183	0.018µF	2.00±0.20	2.00±0.20	2.00±0.20	2.00±0.20	2.00±0.20			1.60±0.20	1.60±0.20	1.60±0.20
	223	0.022µF	2.00±0.20	2.00±0.20	2.00±0.20	2.00±0.20	2.00±0.20			1.60±0.20	1.60±0.20	1.60±0.20
	273	0.027µF	2.00±0.20	2.00±0.20	2.00±0.20	2.00±0.20	2.00±0.20					
	333	0.033µF	2.00±0.20	2.00±0.20	2.00±0.20	2.00±0.20	2.00±0.20					
	393	0.039µF	2.00±0.20	2.00±0.20	2.00±0.20	2.00±0.20	2.00±0.20					
	473	0.047µF	2.00±0.20	2.00±0.20	2.00±0.20	2.00±0.20	2.00±0.20					

Note: Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

VOLTAGE AND CAPACITANCE RANGE

Values that are typically available. (Thickness in mm).

COG (NPO) DIELECTRIC (1812, 1825, 2220)

SIZE (INCHES)		1812	1825	2220			
VDCW (MAX)		1000V	500V	500V	630V	1000V	2000V
100	10pF						
120	12pF						
150	15pF						
180	18pF						
220	22pF						
270	27pF						
330	33pF						
390	39pF						
470	47pF						
560	56pF						
680	68pF						
820	82pF						
101	100pF						
121	120pF						
151	150pF						
181	180pF						
221	220pF						
271	270pF						
331	330pF			1.25±0.20	1.25±0.20	1.25±0.20	
391	390pF			1.25±0.20	1.25±0.20	1.25±0.20	1.25±0.20
471	470pF			1.25±0.20	1.25±0.20	1.25±0.20	1.25±0.20
561	560pF			1.25±0.20	1.25±0.20	1.25±0.20	1.25±0.20
681	680pF			1.25±0.20	1.25±0.20	1.25±0.20	1.25±0.20
821	820pF			1.25±0.20	1.25±0.20	1.25±0.20	1.25±0.20
102	1000pF	1.60±0.20		1.25±0.20	1.25±0.20	1.25±0.20	1.25±0.20
122	1200pF	1.60±0.20		1.25±0.20	1.25±0.20	1.25±0.20	1.25±0.20
152	1500pF	2.00±0.20		1.25±0.20	1.25±0.20	1.25±0.20	1.25±0.20
182	1800pF	2.00±0.20		1.25±0.20	1.25±0.20	1.25±0.20	1.25±0.20
222	2200pF	2.00±0.20		1.25±0.20	1.25±0.20	1.25±0.20	1.25±0.20
272	2700pF	2.00±0.20		1.25±0.20	1.25±0.20	1.25±0.20	1.60±0.20
332	3300pF	2.00±0.20		1.25±0.20	1.25±0.20	1.25±0.20	1.60±0.20
392	3900pF	2.00±0.20		1.25±0.20	1.25±0.20	1.25±0.20	1.60±0.20
472	4700pF	2.00±0.20		1.25±0.20	1.25±0.20	1.25±0.20	2.00±0.20
562	5600pF	2.40±0.20		1.25±0.20	1.25±0.20	1.25±0.20	2.00±0.20
682	6800pF	2.40±0.20		1.25±0.20	1.25±0.20	1.25±0.20	2.40±0.20
822	8200pF			1.60±0.20	1.60±0.20	1.60±0.20	
103	0.010μF		1.25±0.20	1.60±0.20	1.60±0.20	1.60±0.20	
123	0.012μF		1.60±0.20	2.00±0.20	2.00±0.20	2.00±0.20	
153	0.015μF		1.60±0.20	2.00±0.20	2.00±0.20	2.00±0.20	
183	0.018μF		1.60±0.20	2.40±0.20	2.40±0.20	2.40±0.20	
223	0.022μF		2.00±0.20	2.40±0.20	2.40±0.20	2.40±0.20	
273	0.027μF						
333	0.033μF		2.00±0.20	3.20±0.20	3.20±0.20	3.20±0.20	
393	0.039μF		2.00±0.20				
473	0.047μF		2.40±0.20				

CAPACITANCE CODE

CAPACITANCE VALUE

VOLTAGE AND CAPACITANCE RANGE

X7R DIELECTRIC (0201, 0402)

Values that are typically available. (Thickness in mm).

SIZE (INCHES)		0201				0402			
VDCW (MAX)		10V	16V	25V	50V	10V	16V	25V	50V
101	100pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
121	120pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
151	150pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
181	180pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
221	220pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
271	270pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
331	330pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
391	390pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
471	470pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
561	560pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
681	680pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
821	820pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
102	1000pF	0.30±0.03	0.30±0.03	0.30±0.03	0.30±0.03	0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
122	1200pF	0.30±0.03	0.30±0.03	0.30±0.03		0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
152	1500pF	0.30±0.03	0.30±0.03	0.30±0.03		0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
182	1800pF	0.30±0.03	0.30±0.03	0.30±0.03		0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
222	2200pF	0.30±0.03	0.30±0.03	0.30±0.03		0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
272	2700pF	0.30±0.03	0.30±0.03	0.30±0.03		0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
332	3300pF	0.30±0.03	0.30±0.03	0.30±0.03		0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
392	3900pF	0.30±0.03	0.30±0.03	0.30±0.03		0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
472	4700pF	0.30±0.03	0.30±0.03	0.30±0.03		0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
562	5600pF	0.30±0.03	0.30±0.03	0.30±0.03		0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
682	6800pF	0.30±0.03				0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
822	8200pF	0.30±0.03				0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
103	0.010μF	0.30±0.03	0.30±0.03			0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
123	0.012μF					0.50±0.05	0.50±0.05	0.50±0.05	
153	0.015μF					0.50±0.05	0.50±0.05	0.50±0.05	
183	0.018μF					0.50±0.05	0.50±0.05	0.50±0.05	
223	0.022μF					0.50±0.05	0.50±0.05	0.50±0.05	
273	0.027μF					0.50±0.05	0.50±0.05	0.50±0.05	
333	0.033μF					0.50±0.05	0.50±0.05	0.50±0.05	
393	0.039μF					0.50±0.05	0.50±0.05	0.50±0.05	
473	0.047μF					0.50±0.05	0.50±0.05	0.50±0.05	
563	0.056μF					0.50±0.05	0.50±0.05	0.50±0.05	
683	0.068μF					0.50±0.05	0.50±0.05	0.50±0.05	
823	0.082μF					0.50±0.05	0.50±0.05	0.50±0.05	
104	0.10μF					0.50±0.05	0.50±0.05	0.50±0.05	0.50±0.05
124	0.12μF								
154	0.15μF								
184	0.18μF								
224	0.22μF							0.50±0.05	
334	0.33μF								

Note: Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

VOLTAGE AND CAPACITANCE RANGE

X7R DIELECTRIC (1206)

Values that are typically available. (Thickness in mm).

SIZE (INCHES)		1206									
VDCW (MAX)		10V	16V	25V	50V	100V	200V	250V	500V	630V	1000V
101	100pF						1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
121	120pF						1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
151	150pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
181	180pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
221	220pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
271	270pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
331	330pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
391	390pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
471	470pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
561	560pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
681	680pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
821	820pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
102	1000pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.20
122	1200pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.20
152	1500pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.20
182	1800pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.20
222	2200pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.20
272	2700pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.60±0.20
332	3300pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.60±0.20
392	3900pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.60±0.20
472	4700pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.60±0.20
562	5600pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
682	6800pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
822	8200pF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
103	0.010µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10	
123	0.012µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10			
153	0.015µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10			
183	0.018µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10			
223	0.022µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10	1.25±0.10			
273	0.027µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10		0.85±0.15			
333	0.033µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10		0.85±0.15			
393	0.039µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10		0.85±0.15			
473	0.047µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10		1.00±0.10			
563	0.056µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10		1.00±0.10			
683	0.068µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10		1.25±0.20			
823	0.082µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10		1.25±0.20			
104	0.10µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10		1.60±0.20			
124	0.12µF	0.80±0.10	0.80±0.10	0.80±0.10	0.80±0.10	1.25±0.10					
154	0.15µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20					
184	0.18µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20					
224	0.22µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20					
274	0.27µF	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.60±0.20					
334	0.33µF	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.60±0.20					
394	0.39µF	0.95±0.10	0.95±0.10	1.15±0.15	1.60±0.3/-0.1	1.60±0.20					
474	0.47µF	1.15±0.15	1.15±0.15	1.15±0.15	1.60±0.3/-0.1	1.60±0.20					
564	0.56µF	1.15±0.15	1.15±0.15	1.15±0.15	1.60±0.3/-0.1	1.60±0.20					
684	0.68µF	1.15±0.15	1.15±0.15	1.15±0.15	1.60±0.3/-0.1	1.60±0.20					
824	0.82µF	1.15±0.15	1.15±0.15	1.15±0.15	1.60±0.3/-0.1	1.60±0.20					
105	1µF	1.15±0.15	1.15±0.15	1.15±0.15	1.60±0.3/-0.1	1.60±0.20					
225	2.2µF		1.15±0.15	1.60±0.20	1.60±0.3/-0.1	1.60±0.3/-0.1					
475	4.7µF			1.60±0.20	1.60±0.20						
106	10µF		1.60±0.30	1.60±0.30							

VOLTAGE AND CAPACITANCE RANGE

X7R DIELECTRIC (1210)

Values that are typically available. (Thickness in mm).

SIZE (INCHES)		1210									
VDCW (MAX)		10V	16V	25V	50V	100V	250V	500V	630V	1000V	2000V
101	100pF						1.25±0.10	1.25±0.10		1.25±0.10	
121	120pF						1.25±0.10	1.25±0.10		1.25±0.10	
151	150pF						1.25±0.10	1.25±0.10		1.25±0.10	
181	180pF						1.25±0.10	1.25±0.10		1.25±0.10	
221	220pF						1.25±0.10	1.25±0.10		1.25±0.10	1.00±0.10
271	270pF						1.25±0.10	1.25±0.10		1.25±0.10	1.00±0.10
331	330pF						1.25±0.10	1.25±0.10		1.25±0.10	1.00±0.10
391	390pF						1.25±0.10	1.25±0.10		1.25±0.10	1.00±0.10
471	470pF						1.25±0.10	1.25±0.10		1.25±0.10	1.00±0.10
561	560pF						1.25±0.10	1.25±0.10		1.25±0.10	1.00±0.10
681	680pF						0.95±0.10	1.25±0.10		1.25±0.10	1.00±0.10
821	820pF						0.95±0.10	1.25±0.10		1.25±0.10	1.00±0.10
102	1000pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10		1.25±0.10	1.25±0.20
122	1200pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10		1.25±0.10	1.25±0.20
152	1500pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10		1.25±0.10	1.60±0.20
182	1800pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10		1.25±0.10	1.60±0.20
222	2200pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10		1.25±0.10	1.60±0.20
272	2700pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10		1.25±0.10	
332	3300pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10		1.25±0.10	
392	3900pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10		1.60±0.20	
472	4700pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.00±0.10	1.60±0.20	
562	5600pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.00±0.10	1.60±0.20	
682	6800pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.00±0.10	1.60±0.20	
822	8200pF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.20	1.60±0.20	
103	0.010µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.20	1.60±0.20	
123	0.012µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.20		
153	0.015µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.20		
183	0.018µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.20		
223	0.022µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	1.25±0.20		
273	0.027µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20	1.60±0.20		
333	0.033µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	2.00±0.20	2.00±0.20		
393	0.039µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	2.00±0.20	2.00±0.20		
473	0.047µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10	2.40±0.20	2.40±0.20		
563	0.056µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.00±0.10				
683	0.068µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.20				
823	0.082µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	1.60±0.20				
104	0.10µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10	2.00±0.20				
124	0.12µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10		2.00±0.20				
154	0.15µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10		2.00±0.20				
184	0.18µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10		2.00±0.20				
224	0.22µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10		2.00±0.20				
274	0.27µF	0.95±0.10	0.95±0.10	0.95±0.10	0.95±0.10						
334	0.33µF	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10						
394	0.39µF	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10						
474	0.47µF	0.95±0.10	0.95±0.10	0.95±0.10	1.25±0.10						
564	0.56µF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10						
684	0.68µF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10						
824	0.82µF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10						
105	1µF	1.25±0.10	1.25±0.10	1.25±0.10	1.25±0.10						
155	1.5µF		2.00±0.20	2.00±0.20	2.00±0.20						
225	2.2µF		2.00±0.20	2.00±0.20	2.50±0.30	2.50±0.30					
475	4.7µF			2.00±0.20	2.50±0.30	2.50±0.30					
106	10µF			2.40±0.20	2.50±0.30						

VOLTAGE AND CAPACITANCE RANGE

X7R DIELECTRIC (1812, 2220, 2225)

Values that are typically available. (Thickness in mm).

SIZE (INCHES)		1812		2220			2225		
VDCW (MAX)		1000V	2000V	630V	1000V	2000V	3000V	630V	1000V
101	100pF								
121	120pF								
151	150pF						1.25±0.20		
181	180pF						1.25±0.20		
221	220pF		1.25±0.20				1.25±0.20		
271	270pF		1.25±0.20				1.25±0.20		
331	330pF	1.25±0.20	1.25±0.20				1.25±0.20		
391	390pF	1.25±0.20	1.25±0.20				1.25±0.20		
471	470pF	1.25±0.20	1.25±0.20				1.25±0.20		
561	560pF	1.25±0.20	1.25±0.20				1.25±0.20		
681	680pF	1.25±0.20	1.25±0.20				1.25±0.20		
821	820pF	1.25±0.20	1.25±0.20				1.25±0.20		
102	1000pF	1.25±0.20	1.25±0.20			2.00±0.20	1.25±0.20		
122	1200pF	1.25±0.20	1.25±0.20			2.00±0.20	1.25±0.20		
152	1500pF	1.25±0.20	1.25±0.20			2.00±0.20	1.25±0.20		
182	1800pF	1.25±0.20	1.25±0.20			2.00±0.20	1.25±0.20		
222	2200pF	1.25±0.20	1.25±0.20			2.00±0.20	1.25±0.20		
272	2700pF	1.25±0.20	1.25±0.20		1.25±0.20	2.00±0.20	1.60±0.20		1.25±0.20
332	3300pF	1.25±0.20	1.25±0.20		1.25±0.20	2.00±0.20	1.60±0.20		1.25±0.20
392	3900pF	1.25±0.20	1.25±0.20		1.25±0.20	2.00±0.20	1.60±0.20		1.25±0.20
472	4700pF	1.25±0.20	1.60±0.20		1.25±0.20	2.00±0.20	1.60±0.20		1.25±0.20
562	5600pF	1.60±0.20	1.60±0.20		1.25±0.20	2.00±0.20	2.00±0.20		1.25±0.20
682	6800pF	1.60±0.20	1.60±0.20		1.25±0.20	2.00±0.20	2.00±0.20		1.25±0.20
822	8200pF	1.60±0.20	2.00±0.20		1.25±0.20	2.00±0.20	2.00±0.20		1.25±0.20
103	0.010µF	1.60±0.20	2.00±0.20		1.60±0.20	2.00±0.20	2.00±0.20		1.25±0.20
123	0.012µF		2.00±0.20		1.60±0.20	2.40±0.20			1.25±0.20
153	0.015µF				1.60±0.20	2.40±0.20			1.25±0.20
183	0.018µF				1.60±0.20	2.40±0.20			1.25±0.20
223	0.022µF			1.25±0.20	1.60±0.20	2.40±0.20		1.25±0.20	1.25±0.20
273	0.027µF			1.25±0.20	1.60±0.20			1.25±0.20	1.25±0.20
333	0.033µF			1.25±0.20	1.60±0.20			1.25±0.20	1.25±0.20
393	0.039µF			1.25±0.20	1.60±0.20			1.25±0.20	1.25±0.20
473	0.047µF			1.25±0.20	1.60±0.20			1.25±0.20	1.60±0.20
563	0.056µF			1.25±0.20	1.60±0.20			1.25±0.20	1.60±0.20
683	0.068µF			1.25±0.20	1.60±0.20			1.25±0.20	1.60±0.20
823	0.082µF			1.25±0.20	2.00±0.20			1.25±0.20	1.60±0.20
104	0.10µF			1.60±0.20	2.00±0.20			1.60±0.20	2.00±0.20
124	0.12µF			2.00±0.20				2.00±0.20	
154	0.15µF			2.00±0.20				2.00±0.20	
184	0.18µF							2.00±0.20	
224	0.22µF							2.00±0.20	
274	0.27µF							2.40±0.20	
334	0.33µF							2.40±0.20	
394	0.39µF							2.80±0.20	
474	0.47µF							2.80±0.20	
564	0.56µF								
684	0.68µF								
824	0.82µF								
105	1µF								
155	1.5µF								
225	2.2µF								
475	4.7µF								
106	10µF								

RELIABILITY TEST CONDITIONS & REQUIREMENTS

ITEM	AEC-Q200 TEST CONDITION	REQUIREMENTS																																														
1. Visual and Mechanical	* Visual Inspection * Measurement by precision calipers	* No remarkable defect. * Dimensions to conform to individual specification sheet.																																														
2. Electrical Characterization - Capacitance	Q/D.F. (Dissipation Factor) Test Temp: Room Temperature. Class I: (NPO) Cap≤1000pF, 1.0±0.2Vrms, 1MHz±10% Cap>1000pF, 1.0±0.2Vrms, 1KHz±10% Class II: (X7R) Cap<10μF, 1.0±0.2Vrms, 1KHz±10% Cap≥10μF, 0.5±0.2Vrms, 120Hz±20%	* Capacitance within the specified tolerance. * Q/D.F. value: NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C. X7R: <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>RATED VOL.</th> <th>D.F.≤</th> <th colspan="2">EXCEPTION OF D.F.≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">≥100V</td> <td rowspan="3">≤2.5%</td> <td>≤3%</td> <td>1206≥0.47μF</td> </tr> <tr> <td>≤5%</td> <td>0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF</td> </tr> <tr> <td>≤10%</td> <td>0805>0.22μF; 1210≥3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤2.5%</td> <td>≤3%</td> <td>0201(50V);0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td> </tr> <tr> <td>≤5%</td> <td>0201≥0.01μF;1210≥3.3μF</td> </tr> <tr> <td>≤10%</td> <td>0402≥0.012μF; 0603>0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>35V</td> <td>≤3.5%</td> <td>≤10%</td> <td>0603≥1μF; 0805≥2.2μF ;1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤3.5%</td> <td>≤5%</td> <td>0201≥0.01μF; 0805≥1μF; 1210≥10μF</td> </tr> <tr> <td>≤7%</td> <td>0603≥0.33μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td>≤12.5%</td> <td>0402≥0.47μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤3.5%</td> <td>≤5%</td> <td>0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.022μF; 0402≥0.15μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.1μF; 0402≥1μF</td> </tr> </tbody> </table>	RATED VOL.	D.F.≤	EXCEPTION OF D.F.≤		≥100V	≤2.5%	≤3%	1206≥0.47μF	≤5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF	≤10%	0805>0.22μF; 1210≥3.3μF	50V	≤2.5%	≤3%	0201(50V);0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤5%	0201≥0.01μF;1210≥3.3μF	≤10%	0402≥0.012μF; 0603>0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF	35V	≤3.5%	≤10%	0603≥1μF; 0805≥2.2μF ;1206≥2.2μF; 1210≥10μF	25V	≤3.5%	≤5%	0201≥0.01μF; 0805≥1μF; 1210≥10μF	≤7%	0603≥0.33μF	≤10%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	≤12.5%	0402≥0.47μF	16V	≤3.5%	≤5%	0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	≤10%	0201≥0.022μF; 0402≥0.15μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	10V	≤5%	≤10%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤15%	0201≥0.1μF; 0402≥1μF
RATED VOL.	D.F.≤	EXCEPTION OF D.F.≤																																														
≥100V	≤2.5%	≤3%	1206≥0.47μF																																													
		≤5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF																																													
		≤10%	0805>0.22μF; 1210≥3.3μF																																													
50V	≤2.5%	≤3%	0201(50V);0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																													
		≤5%	0201≥0.01μF;1210≥3.3μF																																													
		≤10%	0402≥0.012μF; 0603>0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF																																													
35V	≤3.5%	≤10%	0603≥1μF; 0805≥2.2μF ;1206≥2.2μF; 1210≥10μF																																													
25V	≤3.5%	≤5%	0201≥0.01μF; 0805≥1μF; 1210≥10μF																																													
		≤7%	0603≥0.33μF																																													
		≤10%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
		≤12.5%	0402≥0.47μF																																													
16V	≤3.5%	≤5%	0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																													
		≤10%	0201≥0.022μF; 0402≥0.15μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
10V	≤5%	≤10%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																													
		≤15%	0201≥0.1μF; 0402≥1μF																																													
3. Electrical Characterization- Insulation Resistance	Test Temp: Room Temperature. To apply rated voltage(500V max.) for max. 120sec.	* IR. ≥10GΩ or RxC≥500Ω-F whichever is smaller. Class II (X7R) <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Rated Voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R</td> <td rowspan="6" style="text-align: center;">10GΩ or RxC ≥100Ω-F whichever is smaller</td> </tr> <tr> <td>50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td> </tr> <tr> <td>35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td> </tr> <tr> <td>16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td> </tr> <tr> <td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td> </tr> <tr> <th>Rated Voltage</th> <th>Insulation Resistance</th> </tr> <tr> <td>100V: 1210≥3.3μF</td> <td rowspan="6" style="text-align: center;">RxC ≥50Ω-F</td> </tr> <tr> <td>50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF</td> </tr> <tr> <td>35V: 0603≥1μF</td> </tr> <tr> <td>25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF</td> </tr> <tr> <td>16V: 0201≥0.22μF; 0402≥1μF; 0603≥10μF</td> </tr> <tr> <td>10V: 0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF</td> </tr> </tbody> </table>	Rated Voltage	Insulation Resistance	100V: All X7R	10GΩ or RxC ≥100Ω-F whichever is smaller	50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	Rated Voltage	Insulation Resistance	100V: 1210≥3.3μF	RxC ≥50Ω-F	50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF	35V: 0603≥1μF	25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF	16V: 0201≥0.22μF; 0402≥1μF; 0603≥10μF	10V: 0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF																												
Rated Voltage	Insulation Resistance																																															
100V: All X7R	10GΩ or RxC ≥100Ω-F whichever is smaller																																															
50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																
35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																
16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																
Rated Voltage	Insulation Resistance																																															
100V: 1210≥3.3μF	RxC ≥50Ω-F																																															
50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF																																																
35V: 0603≥1μF																																																
25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF																																																
16V: 0201≥0.22μF; 0402≥1μF; 0603≥10μF																																																
10V: 0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF																																																

RELIABILITY TEST CONDITIONS & REQUIREMENTS

ITEM	AEC-Q200 TEST CONDITION	REQUIREMENTS																																																							
3. Electrical Characterization-Dielectric Strength	<p>* To apply voltage:</p> <p>≤100V: ≥250% of rated voltage. 200V - 300V: ≥200% of rated voltage. 400V - 450V: ≥120% of rated voltage. 500V - 999V: ≥150% of rated voltage. 1000V - 3000V: ≥120% of rated voltage.</p> <p>*Duration: 1 to 5 sec. *Charge & discharge current less than 50mA. *Temperature Coefficient (with no electrical load) *Operation Temperature: -55-125°C at 25°C</p>	<p>* No evidence of damage or flash over during test.</p> <p>*Temperature Coefficient Capacitance Change: NPO: Within ±30ppm/°C X7R: Within ±15%</p>																																																							
4. High Temperature Exposure (Storage) MIL-STD-202 Method 108	<p>* Test temp: 150±3°C * Unpowered * Test time: 1000+24/-0 hrs. * Measurement to be made after keeping at room temp. for 24±2 hrs.</p>	<p>* No remarkable damage. * Cap change: NPO: within ±2.5% or ±0.25pF whichever is larger. X7R: within ±10%</p> <p>*Q/D.F. value: NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C. X7R:</p> <table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>D.F. ≤</th> <th colspan="2">EXCEPTION OF D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">≥100V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>1206≥0.47μF</td> </tr> <tr> <td>≤7.5%</td> <td>0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF</td> </tr> <tr> <td>≤20%</td> <td>0805>0.22μF; 1210≥3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.01μF; 1210≥3.3μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td>≤20%</td> <td>0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤5%</td> <td>≤10%</td> <td>0201≥0.01μF; 0805≥1μF; 1210≥10μF</td> </tr> <tr> <td>≤14%</td> <td>0603≥0.33μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.47μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.22μF; 0402≥0.33μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤7.5%</td> <td>≤15%</td> <td>0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td> </tr> <tr> <td>≤20%</td> <td>0201≥0.1μF; 0402≥1μF</td> </tr> </tbody> </table> <p>* I.R.: ≥ 10GΩ or RxC≥500Ω-F whichever is smaller</p> <p>Class II (X7R)</p> <table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R; 1210≥3.3μF</td> <td rowspan="6">1GΩ or RxC ≥10Ω-F whichever is smaller</td> </tr> <tr> <td>50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td> </tr> <tr> <td>35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td> </tr> <tr> <td>16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td> </tr> <tr> <td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td> </tr> </tbody> </table>	RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤		≥100V	≤3%	≤6%	1206≥0.47μF	≤7.5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF	≤20%	0805>0.22μF; 1210≥3.3μF	50V	≤3%	≤6%	0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤10%	0201≥0.01μF; 1210≥3.3μF	≤20%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF	35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V	≤5%	≤10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF	≤14%	0603≥0.33μF	≤15%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	≤20%	0402≥0.47μF	16V	≤5%	≤10%	0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	≤15%	0201≥0.22μF; 0402≥0.33μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	10V	≤7.5%	≤15%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤20%	0201≥0.1μF; 0402≥1μF	RATED VOLTAGE	INSULATION RESISTANCE	100V: All X7R; 1210≥3.3μF	1GΩ or RxC ≥10Ω-F whichever is smaller	50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF
RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤																																																							
≥100V	≤3%	≤6%	1206≥0.47μF																																																						
		≤7.5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF																																																						
		≤20%	0805>0.22μF; 1210≥3.3μF																																																						
50V	≤3%	≤6%	0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																																						
		≤10%	0201≥0.01μF; 1210≥3.3μF																																																						
		≤20%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF																																																						
35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																						
25V	≤5%	≤10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF																																																						
		≤14%	0603≥0.33μF																																																						
		≤15%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																																						
		≤20%	0402≥0.47μF																																																						
16V	≤5%	≤10%	0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																																						
		≤15%	0201≥0.22μF; 0402≥0.33μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																																						
10V	≤7.5%	≤15%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																																						
		≤20%	0201≥0.1μF; 0402≥1μF																																																						
RATED VOLTAGE	INSULATION RESISTANCE																																																								
100V: All X7R; 1210≥3.3μF	1GΩ or RxC ≥10Ω-F whichever is smaller																																																								
50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																									
35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																									
25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																									
16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																									
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																									

RELIABILITY TEST CONDITIONS & REQUIREMENTS

ITEM	AEC-Q200 TEST CONDITION	REQUIREMENTS																																															
5. Temperature Cycling JESD22 Method JA-104	* Conduct 1000 cycles according to the temperatures and time. <table border="1"> <thead> <tr> <th>STEP</th> <th>TEMP. (°C)</th> <th>TIME (MIN.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-55°C +0/-3</td> <td>5±1</td> </tr> <tr> <td>2</td> <td>+125°C +3/-0</td> <td>5±1</td> </tr> </tbody> </table> * Before initial measurement (X7R only): Perform 150+0/-10°C FOR 1hr and then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs.	STEP	TEMP. (°C)	TIME (MIN.)	1	-55°C +0/-3	5±1	2	+125°C +3/-0	5±1	* No remarkable damage. * Cap change: NPO: within ±2.5% or ±0.25pF whichever is larger. X7R: within ±10% *Q/D.F. value: NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C. X7R:																																						
		STEP	TEMP. (°C)	TIME (MIN.)																																													
		1	-55°C +0/-3	5±1																																													
		2	+125°C +3/-0	5±1																																													
		<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>D.F. ≤</th> <th colspan="2">EXCEPTION OF D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">≥100V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>1206≥0.47μF</td> </tr> <tr> <td>≤7.5%</td> <td>0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF</td> </tr> <tr> <td>≤20%</td> <td>0805>0.22μF; 1210≥3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.01μF; 1210≥3.3μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td>≤20%</td> <td>0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤5%</td> <td>≤10%</td> <td>0201≥0.01μF; 0805≥1μF; 1210≥10μF</td> </tr> <tr> <td>≤14%</td> <td>0603≥0.33μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.47μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.22μF; 0402≥0.33μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤7.5%</td> <td>≤15%</td> <td>0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td> </tr> <tr> <td>≤20%</td> <td>0201≥0.1μF; 0402≥1μF</td> </tr> </tbody> </table>		RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤		≥100V	≤3%	≤6%	1206≥0.47μF	≤7.5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF	≤20%	0805>0.22μF; 1210≥3.3μF	50V	≤3%	≤6%	0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤10%	0201≥0.01μF; 1210≥3.3μF	≤20%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF	35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V	≤5%	≤10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF	≤14%	0603≥0.33μF	≤15%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	≤20%	0402≥0.47μF	16V	≤5%	≤10%	0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	≤15%	0201≥0.22μF; 0402≥0.33μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	10V	≤7.5%	≤15%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤20%	0201≥0.1μF; 0402≥1μF
		RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤																																													
		≥100V	≤3%	≤6%	1206≥0.47μF																																												
				≤7.5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF																																												
				≤20%	0805>0.22μF; 1210≥3.3μF																																												
		50V	≤3%	≤6%	0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																												
≤10%	0201≥0.01μF; 1210≥3.3μF																																																
≤20%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF																																																
35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																														
25V	≤5%	≤10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF																																														
		≤14%	0603≥0.33μF																																														
		≤15%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																														
		≤20%	0402≥0.47μF																																														
16V	≤5%	≤10%	0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																														
		≤15%	0201≥0.22μF; 0402≥0.33μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																														
10V	≤7.5%	≤15%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																														
		≤20%	0201≥0.1μF; 0402≥1μF																																														
* I.R.: ≥ 10GΩ or RxC≥500Ω-F whichever is smaller Class II (X7R)																																																	
<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R; 1210≥3.3μF</td> <td rowspan="6"> 1GΩ or RxC ≥10Ω-F whichever is smaller </td> </tr> <tr> <td>50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td> </tr> <tr> <td>35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td> </tr> <tr> <td>16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td> </tr> <tr> <td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td> </tr> </tbody> </table>		RATED VOLTAGE	INSULATION RESISTANCE	100V: All X7R; 1210≥3.3μF	1GΩ or RxC ≥10Ω-F whichever is smaller	50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																							
RATED VOLTAGE	INSULATION RESISTANCE																																																
100V: All X7R; 1210≥3.3μF	1GΩ or RxC ≥10Ω-F whichever is smaller																																																
50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																	
35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																	
25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																	
16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																	
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																	

RELIABILITY TEST CONDITIONS & REQUIREMENTS

ITEM	AEC-Q200 TEST CONDITION	REQUIREMENTS																																														
6. Moisture Resistance MIL-STD-202 Method 106	* Test temp.: 25-65°C * Humidity: 80-100% RH * Test time: 10 cycles, t=24hrs/cycle. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change: NPO: within ±3.0% or ±0.30pF whichever is larger. X7R: within ±12.5% *Q/D.F. value: NPO: More than 30pF Q≥350; 10pF≤Cap<30pF, Q≥275+2.5C. Less than 10pF Q≥200+10C X7R:																																														
		<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>D.F. ≤</th> <th colspan="2">EXCEPTION OF D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">≥100V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>1206≥0.47μF</td> </tr> <tr> <td>≤7.5%</td> <td>0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF</td> </tr> <tr> <td>≤20%</td> <td>0805>0.22μF; 1210≥3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.01μF; 1210≥3.3μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td>≤20%</td> <td>0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤5%</td> <td>≤10%</td> <td>0201≥0.01μF; 0805≥1μF; 1210≥10μF</td> </tr> <tr> <td>≤14%</td> <td>0603≥0.33μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.47μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.022μF; 0402≥0.033μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤7.5%</td> <td>≤15%</td> <td>0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td> </tr> <tr> <td>≤20%</td> <td>0201≥0.1μF; 0402≥1μF</td> </tr> </tbody> </table>	RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤		≥100V	≤3%	≤6%	1206≥0.47μF	≤7.5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF	≤20%	0805>0.22μF; 1210≥3.3μF	50V	≤3%	≤6%	0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤10%	0201≥0.01μF; 1210≥3.3μF	≤20%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF	35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V	≤5%	≤10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF	≤14%	0603≥0.33μF	≤15%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	≤20%	0402≥0.47μF	16V	≤5%	≤10%	0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	≤15%	0201≥0.022μF; 0402≥0.033μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	10V	≤7.5%	≤15%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤20%	0201≥0.1μF; 0402≥1μF
		RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤																																												
		≥100V	≤3%	≤6%	1206≥0.47μF																																											
				≤7.5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF																																											
				≤20%	0805>0.22μF; 1210≥3.3μF																																											
		50V	≤3%	≤6%	0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																											
				≤10%	0201≥0.01μF; 1210≥3.3μF																																											
				≤20%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF																																											
		35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																											
25V	≤5%	≤10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF																																													
		≤14%	0603≥0.33μF																																													
		≤15%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
		≤20%	0402≥0.47μF																																													
16V	≤5%	≤10%	0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																													
		≤15%	0201≥0.022μF; 0402≥0.033μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
10V	≤7.5%	≤15%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																													
		≤20%	0201≥0.1μF; 0402≥1μF																																													
* I.R.: ≥ 10GΩ or RxC≥500Ω-F whichever is smaller Class II (X7R)																																																
<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R; 1210≥3.3μF</td> <td rowspan="6">1GΩ or RxC ≥10Ω-F whichever is smaller</td> </tr> <tr> <td>50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td> </tr> <tr> <td>35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td> </tr> <tr> <td>16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td> </tr> <tr> <td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td> </tr> </tbody> </table>		RATED VOLTAGE	INSULATION RESISTANCE	100V: All X7R; 1210≥3.3μF	1GΩ or RxC ≥10Ω-F whichever is smaller	50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																						
RATED VOLTAGE	INSULATION RESISTANCE																																															
100V: All X7R; 1210≥3.3μF	1GΩ or RxC ≥10Ω-F whichever is smaller																																															
50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																
35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																
25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																
16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																

RELIABILITY TEST CONDITIONS & REQUIREMENTS

ITEM	AEC-Q200 TEST CONDITION	REQUIREMENTS																																																							
8. Operational Life MIL-STD-202 Method 108	* Test temp.: 125±3°C * To apply voltage: (1) 10V≤Ur≤250V: 200% of rated voltage. (2) 150% of rated voltage: a) 500V b) 0603/X7R/50V/Cap.≥0.1μF c) 0805/X7R/50V/Cap.≥0.68μF d) 1206/X7R/100V/Cap.≥1.0μF e) 1210/X7R/50V&100V/Cap.≥2.2μF (3) 630V≤Ur≤1000V: 120% of rated voltage. * Test time: 1000+24/-0 hrs. * Before initial measurement (X7R only): To apply test voltage for 1hr at 125°C. Remove and let set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change: NPO: within ±3.0% or ±0.30pF whichever is larger. X7R: within ±12.5% * Q/D.F. value: NPO: More than 30pF Q≥350; 10pF≤Cap<30pF, Q≥275+2.5C. Less than 10pF Q≥200+10C X7R: <table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>D.F. ≤</th> <th colspan="2">EXCEPTION OF D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">≥100V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>1206≥0.47μF</td> </tr> <tr> <td>≤7.5%</td> <td>0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF</td> </tr> <tr> <td>≤20%</td> <td>0805>0.22μF; 1210≥3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>0201(50V): 0603≥0.047μF; 0805>0.18μF; 1206≥0.47μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.01μF; 1210≥3.3μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td>≤20%</td> <td>0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤5%</td> <td>≤10%</td> <td>0201≥0.01μF; 0805≥1μF; 1210≥10μF</td> </tr> <tr> <td>≤14%</td> <td>0603≥0.33μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.47μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.022μF; 0402≥0.033μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤7.5%</td> <td>≤15%</td> <td>0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td> </tr> <tr> <td>≤20%</td> <td>0201≥0.1μF; 0402≥1μF</td> </tr> </tbody> </table> <p>* I.R.: ≥ 1GΩ or RxC≥50Ω-F whichever is smaller Class II (X7R)</p> <table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R; 1210≥3.3μF</td> <td rowspan="6">1GΩ or RxC ≥10Ω-F whichever is smaller</td> </tr> <tr> <td>50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td> </tr> <tr> <td>35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td> </tr> <tr> <td>16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td> </tr> <tr> <td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td> </tr> </tbody> </table>	RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤		≥100V	≤3%	≤6%	1206≥0.47μF	≤7.5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF	≤20%	0805>0.22μF; 1210≥3.3μF	50V	≤3%	≤6%	0201(50V): 0603≥0.047μF; 0805>0.18μF; 1206≥0.47μF	≤10%	0201≥0.01μF; 1210≥3.3μF	≤20%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF	35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V	≤5%	≤10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF	≤14%	0603≥0.33μF	≤15%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	≤20%	0402≥0.47μF	16V	≤5%	≤10%	0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	≤15%	0201≥0.022μF; 0402≥0.033μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	10V	≤7.5%	≤15%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤20%	0201≥0.1μF; 0402≥1μF	RATED VOLTAGE	INSULATION RESISTANCE	100V: All X7R; 1210≥3.3μF	1GΩ or RxC ≥10Ω-F whichever is smaller	50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF
RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤																																																							
≥100V	≤3%	≤6%	1206≥0.47μF																																																						
		≤7.5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF																																																						
		≤20%	0805>0.22μF; 1210≥3.3μF																																																						
50V	≤3%	≤6%	0201(50V): 0603≥0.047μF; 0805>0.18μF; 1206≥0.47μF																																																						
		≤10%	0201≥0.01μF; 1210≥3.3μF																																																						
		≤20%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF																																																						
35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																						
25V	≤5%	≤10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF																																																						
		≤14%	0603≥0.33μF																																																						
		≤15%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																																						
		≤20%	0402≥0.47μF																																																						
16V	≤5%	≤10%	0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																																						
		≤15%	0201≥0.022μF; 0402≥0.033μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																																						
10V	≤7.5%	≤15%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																																						
		≤20%	0201≥0.1μF; 0402≥1μF																																																						
RATED VOLTAGE	INSULATION RESISTANCE																																																								
100V: All X7R; 1210≥3.3μF	1GΩ or RxC ≥10Ω-F whichever is smaller																																																								
50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																									
35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																									
25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																									
16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																									
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																									
9. External Visual MIL-STD-883 Method 2009	* Visual Inspection	* No remarkable defect.																																																							
10. Physical Dimension JESD22 Method JB-100	* Using by calipers	* Within the specified dimensions																																																							

RELIABILITY TEST CONDITIONS & REQUIREMENTS

ITEM	AEC-Q200 TEST CONDITION	REQUIREMENTS																																														
11. Resistance to Solvents MIL-STD-202 Method 215	* Temperature.: 25±5°C * Time: 3+0.5/-0 min. * Solvent: Iso-propyl alcohol.	* No remarkable damage. * Cap.: within the specified tolerance. * Q/D.F. value: NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C. X7R:																																														
		<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>D.F. ≤</th> <th colspan="2">EXCEPTION OF D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">≥100V</td> <td rowspan="3">≤2.5%</td> <td>≤3%</td> <td>1206≥0.47μF</td> </tr> <tr> <td>≤5%</td> <td>0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF</td> </tr> <tr> <td>≤10%</td> <td>0805>0.22μF; 1210≥3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤2.5%</td> <td>≤3%</td> <td>0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td> </tr> <tr> <td>≤5%</td> <td>0201≥0.01μF; 1210≥3.3μF</td> </tr> <tr> <td>≤10%</td> <td>0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>35V</td> <td>≤3.5%</td> <td>≤10%</td> <td>0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤3.5%</td> <td>≤5%</td> <td>0201≥0.01μF; 0805≥1μF; 1210≥10μF</td> </tr> <tr> <td>≤7%</td> <td>0603≥0.33μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td>≤12.5%</td> <td>0402≥0.47μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤3.5%</td> <td>≤5%</td> <td>0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.022μF; 0402≥0.15μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.1μF; 0402≥1μF</td> </tr> </tbody> </table>	RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤		≥100V	≤2.5%	≤3%	1206≥0.47μF	≤5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF	≤10%	0805>0.22μF; 1210≥3.3μF	50V	≤2.5%	≤3%	0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤5%	0201≥0.01μF; 1210≥3.3μF	≤10%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF	35V	≤3.5%	≤10%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V	≤3.5%	≤5%	0201≥0.01μF; 0805≥1μF; 1210≥10μF	≤7%	0603≥0.33μF	≤10%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	≤12.5%	0402≥0.47μF	16V	≤3.5%	≤5%	0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	≤10%	0201≥0.022μF; 0402≥0.15μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	10V	≤5%	≤10%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤15%	0201≥0.1μF; 0402≥1μF
		RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤																																												
		≥100V	≤2.5%	≤3%	1206≥0.47μF																																											
				≤5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF																																											
				≤10%	0805>0.22μF; 1210≥3.3μF																																											
		50V	≤2.5%	≤3%	0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																											
				≤5%	0201≥0.01μF; 1210≥3.3μF																																											
				≤10%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF																																											
		35V	≤3.5%	≤10%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																											
25V	≤3.5%	≤5%	0201≥0.01μF; 0805≥1μF; 1210≥10μF																																													
		≤7%	0603≥0.33μF																																													
		≤10%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
		≤12.5%	0402≥0.47μF																																													
16V	≤3.5%	≤5%	0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																													
		≤10%	0201≥0.022μF; 0402≥0.15μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
10V	≤5%	≤10%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																													
		≤15%	0201≥0.1μF; 0402≥1μF																																													
* I.R.: ≥ 10GΩ or RxC≥500Ω-F whichever is smaller Class II (X7R)																																																
<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R</td> <td rowspan="6"> 10GΩ or RxC ≥100Ω-F whichever is smaller </td> </tr> <tr> <td>50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td> </tr> <tr> <td>35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td> </tr> <tr> <td>16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td> </tr> <tr> <td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td> </tr> </tbody> </table>		RATED VOLTAGE	INSULATION RESISTANCE	100V: All X7R	10GΩ or RxC ≥100Ω-F whichever is smaller	50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																						
RATED VOLTAGE	INSULATION RESISTANCE																																															
100V: All X7R	10GΩ or RxC ≥100Ω-F whichever is smaller																																															
50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																
35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																
16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																
<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: 1210≥3.3μF</td> <td rowspan="6"> RxC ≥50Ω-F. </td> </tr> <tr> <td>50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF</td> </tr> <tr> <td>35V: 0603≥1μF</td> </tr> <tr> <td>25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF</td> </tr> <tr> <td>16V: 0201≥0.22μF; 0402≥1μF; 0603≥10μF</td> </tr> <tr> <td>10V: 0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF</td> </tr> </tbody> </table>		RATED VOLTAGE	INSULATION RESISTANCE	100V: 1210≥3.3μF	RxC ≥50Ω-F.	50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF	35V: 0603≥1μF	25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF	16V: 0201≥0.22μF; 0402≥1μF; 0603≥10μF	10V: 0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF																																						
RATED VOLTAGE	INSULATION RESISTANCE																																															
100V: 1210≥3.3μF	RxC ≥50Ω-F.																																															
50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF																																																
35V: 0603≥1μF																																																
25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF																																																
16V: 0201≥0.22μF; 0402≥1μF; 0603≥10μF																																																
10V: 0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF																																																

RELIABILITY TEST CONDITIONS & REQUIREMENTS

ITEM	AEC-Q200 TEST CONDITION	REQUIREMENTS																																														
12. Mechanical Shock MIL-STD-202 Method 213	* Peak value: 1500g's * Wave: 1/2 sine. * Velocity: 15.4 ft/sec * Three shocks in each direction should be applied along 3 mutually perpendicular axis of the test specimen (18 shocks)	* No remarkable damage. * Cap.: within the specified tolerance. * Q/D.F. value: NPO: Cap \geq 30pF, Q \geq 1000; Cap $<$ 30pF, Q \geq 400+20C. X7R:																																														
		<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>D.F. \leq</th> <th colspan="2">EXCEPTION OF D.F. \leq</th> </tr> </thead> <tbody> <tr> <td rowspan="3">\geq100V</td> <td rowspan="3">\leq2.5%</td> <td>\leq3%</td> <td>1206\geq0.47μF</td> </tr> <tr> <td>\leq5%</td> <td>0603\geq0.068μF; 0805$>$0.1μF; 1206\geq1μF; 1210\geq2.2μF</td> </tr> <tr> <td>\leq10%</td> <td>0805$>$0.22μF; 1210\geq3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">\leq2.5%</td> <td>\leq3%</td> <td>0201(50V): 0603\geq0.047μF; 0805\geq0.18μF; 1206\geq0.47μF</td> </tr> <tr> <td>\leq5%</td> <td>0201\geq0.01μF; 1210\geq3.3μF</td> </tr> <tr> <td>\leq10%</td> <td>0402\geq0.012μF; 0603\geq0.1μF; 0805\geq0.47μF; 1206\geq2.2μF; 1210\geq10μF</td> </tr> <tr> <td>35V</td> <td>\leq3.5%</td> <td>\leq10%</td> <td>0603\geq1μF; 0805\geq2.2μF; 1206\geq2.2μF; 1210\geq10μF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">\leq3.5%</td> <td>\leq5%</td> <td>0201\geq0.01μF; 0805\geq1μF; 1210\geq10μF</td> </tr> <tr> <td>\leq7%</td> <td>0603\geq0.33μF</td> </tr> <tr> <td>\leq10%</td> <td>0201\geq0.1μF; 0402\geq0.056μF; 0603\geq0.47μF; 0805\geq2.2μF; 1206\geq4.7μF; 1210\geq22μF</td> </tr> <tr> <td>\leq12.5%</td> <td>0402\geq0.47μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">\leq3.5%</td> <td>\leq5%</td> <td>0201\geq0.01μF; 0402\geq0.033μF; 0603\geq0.15μF; 0805\geq0.68μF; 1206\geq2.2μF; 1210\geq4.7μF</td> </tr> <tr> <td>\leq10%</td> <td>0201\geq0.022μF; 0402\geq0.15μF; 0603\geq0.47μF; 0805\geq2.2μF; 1206\geq4.7μF; 1210\geq22μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">\leq5%</td> <td>\leq10%</td> <td>0201\geq0.012μF; 0402\geq0.15μF; 0603\geq0.33μF; 0805\geq2.2μF; 1206\geq2.2μF; 1210\geq22μF</td> </tr> <tr> <td>\leq15%</td> <td>0201\geq0.1μF; 0402\geq1μF</td> </tr> </tbody> </table>	RATED VOLTAGE	D.F. \leq	EXCEPTION OF D.F. \leq		\geq 100V	\leq 2.5%	\leq 3%	1206 \geq 0.47 μ F	\leq 5%	0603 \geq 0.068 μ F; 0805 $>$ 0.1 μ F; 1206 \geq 1 μ F; 1210 \geq 2.2 μ F	\leq 10%	0805 $>$ 0.22 μ F; 1210 \geq 3.3 μ F	50V	\leq 2.5%	\leq 3%	0201(50V): 0603 \geq 0.047 μ F; 0805 \geq 0.18 μ F; 1206 \geq 0.47 μ F	\leq 5%	0201 \geq 0.01 μ F; 1210 \geq 3.3 μ F	\leq 10%	0402 \geq 0.012 μ F; 0603 \geq 0.1 μ F; 0805 \geq 0.47 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F	35V	\leq 3.5%	\leq 10%	0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F	25V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0805 \geq 1 μ F; 1210 \geq 10 μ F	\leq 7%	0603 \geq 0.33 μ F	\leq 10%	0201 \geq 0.1 μ F; 0402 \geq 0.056 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F	\leq 12.5%	0402 \geq 0.47 μ F	16V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0402 \geq 0.033 μ F; 0603 \geq 0.15 μ F; 0805 \geq 0.68 μ F; 1206 \geq 2.2 μ F; 1210 \geq 4.7 μ F	\leq 10%	0201 \geq 0.022 μ F; 0402 \geq 0.15 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F	10V	\leq 5%	\leq 10%	0201 \geq 0.012 μ F; 0402 \geq 0.15 μ F; 0603 \geq 0.33 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 22 μ F	\leq 15%	0201 \geq 0.1 μ F; 0402 \geq 1 μ F
		RATED VOLTAGE	D.F. \leq	EXCEPTION OF D.F. \leq																																												
		\geq 100V	\leq 2.5%	\leq 3%	1206 \geq 0.47 μ F																																											
				\leq 5%	0603 \geq 0.068 μ F; 0805 $>$ 0.1 μ F; 1206 \geq 1 μ F; 1210 \geq 2.2 μ F																																											
				\leq 10%	0805 $>$ 0.22 μ F; 1210 \geq 3.3 μ F																																											
		50V	\leq 2.5%	\leq 3%	0201(50V): 0603 \geq 0.047 μ F; 0805 \geq 0.18 μ F; 1206 \geq 0.47 μ F																																											
				\leq 5%	0201 \geq 0.01 μ F; 1210 \geq 3.3 μ F																																											
				\leq 10%	0402 \geq 0.012 μ F; 0603 \geq 0.1 μ F; 0805 \geq 0.47 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F																																											
		35V	\leq 3.5%	\leq 10%	0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F																																											
25V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0805 \geq 1 μ F; 1210 \geq 10 μ F																																													
		\leq 7%	0603 \geq 0.33 μ F																																													
		\leq 10%	0201 \geq 0.1 μ F; 0402 \geq 0.056 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F																																													
		\leq 12.5%	0402 \geq 0.47 μ F																																													
16V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0402 \geq 0.033 μ F; 0603 \geq 0.15 μ F; 0805 \geq 0.68 μ F; 1206 \geq 2.2 μ F; 1210 \geq 4.7 μ F																																													
		\leq 10%	0201 \geq 0.022 μ F; 0402 \geq 0.15 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F																																													
10V	\leq 5%	\leq 10%	0201 \geq 0.012 μ F; 0402 \geq 0.15 μ F; 0603 \geq 0.33 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 22 μ F																																													
		\leq 15%	0201 \geq 0.1 μ F; 0402 \geq 1 μ F																																													
* I.R.: \geq 10G Ω or Rx $C \geq$ 500 Ω -F whichever is smaller Class II (X7R)																																																
<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R</td> <td rowspan="6"> 10GΩ or Rx$C \geq$100Ω-F whichever is smaller </td> </tr> <tr> <td>50V: 0402\geq0.01μF; 0603\geq1μF; 0805\geq1μF; 1206\geq4.7μF; 1210\geq4.7μF</td> </tr> <tr> <td>35V: 0805\geq2.2μF; 1206\geq2.2μF; 1210\geq10μF</td> </tr> <tr> <td>25V: 0402\geq1μF; 0603\geq2.2μF; 0805\geq2.2μF; 1206\geq10μF; 1210\geq10μF</td> </tr> <tr> <td>16V: 0201\geq0.1μF; 0402\geq0.22μF; 0603\geq1μF; 0805\geq2.2μF; 1206\geq10μF; 1210\geq47μF</td> </tr> <tr> <td>10V: 0201\geq47nF; 0402\geq0.47μF; 0603\geq0.47μF; 0805\geq2.2μF; 1206\geq4.7μF; 1210\geq47μF</td> </tr> </tbody> </table>		RATED VOLTAGE	INSULATION RESISTANCE	100V: All X7R	10G Ω or Rx $C \geq$ 100 Ω -F whichever is smaller	50V: 0402 \geq 0.01 μ F; 0603 \geq 1 μ F; 0805 \geq 1 μ F; 1206 \geq 4.7 μ F; 1210 \geq 4.7 μ F	35V: 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F	25V: 0402 \geq 1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 2.2 μ F; 1206 \geq 10 μ F; 1210 \geq 10 μ F	16V: 0201 \geq 0.1 μ F; 0402 \geq 0.22 μ F; 0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1206 \geq 10 μ F; 1210 \geq 47 μ F	10V: 0201 \geq 47nF; 0402 \geq 0.47 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 47 μ F																																						
RATED VOLTAGE	INSULATION RESISTANCE																																															
100V: All X7R	10G Ω or Rx $C \geq$ 100 Ω -F whichever is smaller																																															
50V: 0402 \geq 0.01 μ F; 0603 \geq 1 μ F; 0805 \geq 1 μ F; 1206 \geq 4.7 μ F; 1210 \geq 4.7 μ F																																																
35V: 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F																																																
25V: 0402 \geq 1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 2.2 μ F; 1206 \geq 10 μ F; 1210 \geq 10 μ F																																																
16V: 0201 \geq 0.1 μ F; 0402 \geq 0.22 μ F; 0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1206 \geq 10 μ F; 1210 \geq 47 μ F																																																
10V: 0201 \geq 47nF; 0402 \geq 0.47 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 47 μ F																																																
<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: 1210\geq3.3μF</td> <td rowspan="6"> Rx$C \geq$50Ω-F. </td> </tr> <tr> <td>50V: 0402\geq0.1μF; 0603\geq2.2μF; 0805\geq10μF; 1206\geq10μF</td> </tr> <tr> <td>35V: 0603\geq1μF</td> </tr> <tr> <td>25V: 0201\geq0.1μF; 0402\geq2.2μF; 0603\geq10μF; 0805\geq10μF; 1206\geq22μF</td> </tr> <tr> <td>16V: 0201\geq0.22μF; 0402\geq1μF; 0603\geq10μF</td> </tr> <tr> <td>10V: 0201\geq0.1μF; 0402\geq1μF; 0603\geq10μF; 0805\geq47μF</td> </tr> </tbody> </table>		RATED VOLTAGE	INSULATION RESISTANCE	100V: 1210 \geq 3.3 μ F	Rx $C \geq$ 50 Ω -F.	50V: 0402 \geq 0.1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 10 μ F; 1206 \geq 10 μ F	35V: 0603 \geq 1 μ F	25V: 0201 \geq 0.1 μ F; 0402 \geq 2.2 μ F; 0603 \geq 10 μ F; 0805 \geq 10 μ F; 1206 \geq 22 μ F	16V: 0201 \geq 0.22 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F	10V: 0201 \geq 0.1 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F; 0805 \geq 47 μ F																																						
RATED VOLTAGE	INSULATION RESISTANCE																																															
100V: 1210 \geq 3.3 μ F	Rx $C \geq$ 50 Ω -F.																																															
50V: 0402 \geq 0.1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 10 μ F; 1206 \geq 10 μ F																																																
35V: 0603 \geq 1 μ F																																																
25V: 0201 \geq 0.1 μ F; 0402 \geq 2.2 μ F; 0603 \geq 10 μ F; 0805 \geq 10 μ F; 1206 \geq 22 μ F																																																
16V: 0201 \geq 0.22 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F																																																
10V: 0201 \geq 0.1 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F; 0805 \geq 47 μ F																																																

RELIABILITY TEST CONDITIONS & REQUIREMENTS

ITEM	AEC-Q200 TEST CONDITION	REQUIREMENTS																																														
13. Vibration MIL-STD-202 Method 204	* Vibration frequency: 10-2000Hz/min. (5g's for 20min) * Total amplitude: 1.5mm. * 12 cycles each of 3 orientations (36 times)	* No remarkable damage. * Cap.: within the specified tolerance. * Q/D.F. value: NPO: Cap \geq 30pF, Q \geq 1000; Cap $<$ 30pF, Q \geq 400+20C. X7R:																																														
		<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>D.F. \leq</th> <th colspan="2">EXCEPTION OF D.F. \leq</th> </tr> </thead> <tbody> <tr> <td rowspan="3">\geq100V</td> <td rowspan="3">\leq2.5%</td> <td>\leq3%</td> <td>1206\geq0.47μF</td> </tr> <tr> <td>\leq5%</td> <td>0603\geq0.068μF; 0805$>$0.1μF; 1206\geq1μF; 1210\geq2.2μF</td> </tr> <tr> <td>\leq10%</td> <td>0805$>$0.22μF; 1210\geq3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">\leq2.5%</td> <td>\leq3%</td> <td>0201(50V): 0603\geq0.047μF; 0805\geq0.18μF; 1206\geq0.47μF</td> </tr> <tr> <td>\leq5%</td> <td>0201\geq0.01μF; 1210\geq3.3μF</td> </tr> <tr> <td>\leq10%</td> <td>0402\geq0.012μF; 0603\geq0.1μF; 0805\geq0.47μF; 1206\geq2.2μF; 1210\geq10μF</td> </tr> <tr> <td>35V</td> <td>\leq3.5%</td> <td>\leq10%</td> <td>0603\geq1μF; 0805\geq2.2μF; 1206\geq2.2μF; 1210\geq10μF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">\leq3.5%</td> <td>\leq5%</td> <td>0201\geq0.01μF; 0805\geq1μF; 1210\geq10μF</td> </tr> <tr> <td>\leq7%</td> <td>0603\geq0.33μF</td> </tr> <tr> <td>\leq10%</td> <td>0201\geq0.1μF; 0402\geq0.056μF; 0603\geq0.47μF; 0805\geq2.2μF; 1206\geq4.7μF; 1210\geq22μF</td> </tr> <tr> <td>\leq12.5%</td> <td>0402\geq0.47μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">\leq3.5%</td> <td>\leq5%</td> <td>0201\geq0.01μF; 0402\geq0.033μF; 0603\geq0.15μF; 0805\geq0.68μF; 1206\geq2.2μF; 1210\geq4.7μF</td> </tr> <tr> <td>\leq10%</td> <td>0201\geq0.022μF; 0402\geq0.15μF; 0603\geq0.47μF; 0805\geq2.2μF; 1206\geq4.7μF; 1210\geq22μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">\leq5%</td> <td>\leq10%</td> <td>0201\geq0.012μF; 0402\geq0.15μF; 0603\geq0.33μF; 0805\geq2.2μF; 1206\geq2.2μF; 1210\geq22μF</td> </tr> <tr> <td>\leq15%</td> <td>0201\geq0.1μF; 0402\geq1μF</td> </tr> </tbody> </table>	RATED VOLTAGE	D.F. \leq	EXCEPTION OF D.F. \leq		\geq 100V	\leq 2.5%	\leq 3%	1206 \geq 0.47 μ F	\leq 5%	0603 \geq 0.068 μ F; 0805 $>$ 0.1 μ F; 1206 \geq 1 μ F; 1210 \geq 2.2 μ F	\leq 10%	0805 $>$ 0.22 μ F; 1210 \geq 3.3 μ F	50V	\leq 2.5%	\leq 3%	0201(50V): 0603 \geq 0.047 μ F; 0805 \geq 0.18 μ F; 1206 \geq 0.47 μ F	\leq 5%	0201 \geq 0.01 μ F; 1210 \geq 3.3 μ F	\leq 10%	0402 \geq 0.012 μ F; 0603 \geq 0.1 μ F; 0805 \geq 0.47 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F	35V	\leq 3.5%	\leq 10%	0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F	25V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0805 \geq 1 μ F; 1210 \geq 10 μ F	\leq 7%	0603 \geq 0.33 μ F	\leq 10%	0201 \geq 0.1 μ F; 0402 \geq 0.056 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F	\leq 12.5%	0402 \geq 0.47 μ F	16V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0402 \geq 0.033 μ F; 0603 \geq 0.15 μ F; 0805 \geq 0.68 μ F; 1206 \geq 2.2 μ F; 1210 \geq 4.7 μ F	\leq 10%	0201 \geq 0.022 μ F; 0402 \geq 0.15 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F	10V	\leq 5%	\leq 10%	0201 \geq 0.012 μ F; 0402 \geq 0.15 μ F; 0603 \geq 0.33 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 22 μ F	\leq 15%	0201 \geq 0.1 μ F; 0402 \geq 1 μ F
		RATED VOLTAGE	D.F. \leq	EXCEPTION OF D.F. \leq																																												
		\geq 100V	\leq 2.5%	\leq 3%	1206 \geq 0.47 μ F																																											
				\leq 5%	0603 \geq 0.068 μ F; 0805 $>$ 0.1 μ F; 1206 \geq 1 μ F; 1210 \geq 2.2 μ F																																											
				\leq 10%	0805 $>$ 0.22 μ F; 1210 \geq 3.3 μ F																																											
		50V	\leq 2.5%	\leq 3%	0201(50V): 0603 \geq 0.047 μ F; 0805 \geq 0.18 μ F; 1206 \geq 0.47 μ F																																											
				\leq 5%	0201 \geq 0.01 μ F; 1210 \geq 3.3 μ F																																											
				\leq 10%	0402 \geq 0.012 μ F; 0603 \geq 0.1 μ F; 0805 \geq 0.47 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F																																											
		35V	\leq 3.5%	\leq 10%	0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F																																											
25V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0805 \geq 1 μ F; 1210 \geq 10 μ F																																													
		\leq 7%	0603 \geq 0.33 μ F																																													
		\leq 10%	0201 \geq 0.1 μ F; 0402 \geq 0.056 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F																																													
		\leq 12.5%	0402 \geq 0.47 μ F																																													
16V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0402 \geq 0.033 μ F; 0603 \geq 0.15 μ F; 0805 \geq 0.68 μ F; 1206 \geq 2.2 μ F; 1210 \geq 4.7 μ F																																													
		\leq 10%	0201 \geq 0.022 μ F; 0402 \geq 0.15 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F																																													
10V	\leq 5%	\leq 10%	0201 \geq 0.012 μ F; 0402 \geq 0.15 μ F; 0603 \geq 0.33 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 22 μ F																																													
		\leq 15%	0201 \geq 0.1 μ F; 0402 \geq 1 μ F																																													
* I.R.: \geq 10G Ω or RxC \geq 500 Ω -F whichever is smaller Class II (X7R) for rated voltage test																																																
<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R</td> <td rowspan="6">10GΩ or RxC \geq100Ω-F whichever is smaller</td> </tr> <tr> <td>50V: 0402\geq0.01μF; 0603\geq1μF; 0805\geq1μF; 1206\geq4.7μF; 1210\geq4.7μF</td> </tr> <tr> <td>35V: 0805\geq2.2μF; 1206\geq2.2μF; 1210\geq10μF</td> </tr> <tr> <td>25V: 0402\geq1μF; 0603\geq2.2μF; 0805\geq2.2μF; 1206\geq10μF; 1210\geq10μF</td> </tr> <tr> <td>16V: 0201\geq0.1μF; 0402\geq0.22μF; 0603\geq1μF; 0805\geq2.2μF; 1206\geq10μF; 1210\geq47μF</td> </tr> <tr> <td>10V: 0201\geq47nF; 0402\geq0.47μF; 0603\geq0.47μF; 0805\geq2.2μF; 1206\geq4.7μF; 1210\geq47μF</td> </tr> </tbody> </table>		RATED VOLTAGE	INSULATION RESISTANCE	100V: All X7R	10G Ω or RxC \geq 100 Ω -F whichever is smaller	50V: 0402 \geq 0.01 μ F; 0603 \geq 1 μ F; 0805 \geq 1 μ F; 1206 \geq 4.7 μ F; 1210 \geq 4.7 μ F	35V: 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F	25V: 0402 \geq 1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 2.2 μ F; 1206 \geq 10 μ F; 1210 \geq 10 μ F	16V: 0201 \geq 0.1 μ F; 0402 \geq 0.22 μ F; 0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1206 \geq 10 μ F; 1210 \geq 47 μ F	10V: 0201 \geq 47nF; 0402 \geq 0.47 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 47 μ F																																						
RATED VOLTAGE	INSULATION RESISTANCE																																															
100V: All X7R	10G Ω or RxC \geq 100 Ω -F whichever is smaller																																															
50V: 0402 \geq 0.01 μ F; 0603 \geq 1 μ F; 0805 \geq 1 μ F; 1206 \geq 4.7 μ F; 1210 \geq 4.7 μ F																																																
35V: 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F																																																
25V: 0402 \geq 1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 2.2 μ F; 1206 \geq 10 μ F; 1210 \geq 10 μ F																																																
16V: 0201 \geq 0.1 μ F; 0402 \geq 0.22 μ F; 0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1206 \geq 10 μ F; 1210 \geq 47 μ F																																																
10V: 0201 \geq 47nF; 0402 \geq 0.47 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 47 μ F																																																
Class II (X7R) for 1.3-1.5Vdc																																																
<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: 1210\geq3.3μF</td> <td rowspan="6">RxC \geq50Ω-F.</td> </tr> <tr> <td>50V: 0402\geq0.1μF; 0603\geq2.2μF; 0805\geq10μF; 1206\geq10μF</td> </tr> <tr> <td>35V: 0603\geq1μF</td> </tr> <tr> <td>25V: 0201\geq0.1μF; 0402\geq2.2μF; 0603\geq10μF; 0805\geq10μF; 1206\geq22μF</td> </tr> <tr> <td>16V: 0201\geq0.22μF; 0402\geq1μF; 0603\geq10μF</td> </tr> <tr> <td>10V: 0201\geq0.1μF; 0402\geq1μF; 0603\geq10μF; 0805\geq47μF</td> </tr> </tbody> </table>		RATED VOLTAGE	INSULATION RESISTANCE	100V: 1210 \geq 3.3 μ F	RxC \geq 50 Ω -F.	50V: 0402 \geq 0.1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 10 μ F; 1206 \geq 10 μ F	35V: 0603 \geq 1 μ F	25V: 0201 \geq 0.1 μ F; 0402 \geq 2.2 μ F; 0603 \geq 10 μ F; 0805 \geq 10 μ F; 1206 \geq 22 μ F	16V: 0201 \geq 0.22 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F	10V: 0201 \geq 0.1 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F; 0805 \geq 47 μ F																																						
RATED VOLTAGE	INSULATION RESISTANCE																																															
100V: 1210 \geq 3.3 μ F	RxC \geq 50 Ω -F.																																															
50V: 0402 \geq 0.1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 10 μ F; 1206 \geq 10 μ F																																																
35V: 0603 \geq 1 μ F																																																
25V: 0201 \geq 0.1 μ F; 0402 \geq 2.2 μ F; 0603 \geq 10 μ F; 0805 \geq 10 μ F; 1206 \geq 22 μ F																																																
16V: 0201 \geq 0.22 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F																																																
10V: 0201 \geq 0.1 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F; 0805 \geq 47 μ F																																																

RELIABILITY TEST CONDITIONS & REQUIREMENTS

ITEM	AEC-Q200 TEST CONDITION	REQUIREMENTS																																														
14. Resistance to Soldering Heat MIL-STD-202 Method 210	<ul style="list-style-type: none"> * Solder temperature: 260±5°C * Dipping time: 10±1 sec * Before initial measurement (X7R only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs 	<ul style="list-style-type: none"> * No remarkable damage. * Cap. change: NPO: within ±2.5% or 0.25pF whichever is larger X7R: within ±7.5% * Q/D.F. value: NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C. X7R: <table border="1" data-bbox="708 394 1495 1024"> <thead> <tr> <th>RATED VOLTAGE</th> <th>D.F. ≤</th> <th colspan="2">EXCEPTION OF D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">≥100V</td> <td rowspan="3">≤2.5%</td> <td>≤3%</td> <td>1206≥0.47μF</td> </tr> <tr> <td>≤5%</td> <td>0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF</td> </tr> <tr> <td>≤10%</td> <td>0805>0.22μF; 1210≥3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤2.5%</td> <td>≤3%</td> <td>0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td> </tr> <tr> <td>≤5%</td> <td>0201≥0.01μF; 1210≥3.3μF</td> </tr> <tr> <td>≤10%</td> <td>0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>35V</td> <td>≤3.5%</td> <td>≤10%</td> <td>0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤3.5%</td> <td>≤5%</td> <td>0201≥0.01μF; 0805≥1μF; 1210≥10μF</td> </tr> <tr> <td>≤7%</td> <td>0603≥0.33μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td>≤12.5%</td> <td>0402≥0.47μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤3.5%</td> <td>≤5%</td> <td>0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.022μF; 0402≥0.15μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.1μF; 0402≥1μF</td> </tr> </tbody> </table>	RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤		≥100V	≤2.5%	≤3%	1206≥0.47μF	≤5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF	≤10%	0805>0.22μF; 1210≥3.3μF	50V	≤2.5%	≤3%	0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤5%	0201≥0.01μF; 1210≥3.3μF	≤10%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF	35V	≤3.5%	≤10%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V	≤3.5%	≤5%	0201≥0.01μF; 0805≥1μF; 1210≥10μF	≤7%	0603≥0.33μF	≤10%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	≤12.5%	0402≥0.47μF	16V	≤3.5%	≤5%	0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	≤10%	0201≥0.022μF; 0402≥0.15μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	10V	≤5%	≤10%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤15%	0201≥0.1μF; 0402≥1μF
RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤																																														
≥100V	≤2.5%	≤3%	1206≥0.47μF																																													
		≤5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF																																													
		≤10%	0805>0.22μF; 1210≥3.3μF																																													
50V	≤2.5%	≤3%	0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																													
		≤5%	0201≥0.01μF; 1210≥3.3μF																																													
		≤10%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF																																													
35V	≤3.5%	≤10%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																													
25V	≤3.5%	≤5%	0201≥0.01μF; 0805≥1μF; 1210≥10μF																																													
		≤7%	0603≥0.33μF																																													
		≤10%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
		≤12.5%	0402≥0.47μF																																													
16V	≤3.5%	≤5%	0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																													
		≤10%	0201≥0.022μF; 0402≥0.15μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
10V	≤5%	≤10%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																													
		≤15%	0201≥0.1μF; 0402≥1μF																																													
* I.R.: ≥ 10GΩ or RxC≥500Ω-F whichever is smaller Class II (X7R)																																																
<table border="1" style="width: 100%;"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R</td> <td rowspan="6" style="text-align: center; vertical-align: middle;">10GΩ or RxC ≥100Ω-F whichever is smaller</td> </tr> <tr> <td>50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td> </tr> <tr> <td>35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td> </tr> <tr> <td>16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td> </tr> <tr> <td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td> </tr> </tbody> </table>			RATED VOLTAGE	INSULATION RESISTANCE	100V: All X7R	10GΩ or RxC ≥100Ω-F whichever is smaller	50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																					
RATED VOLTAGE	INSULATION RESISTANCE																																															
100V: All X7R	10GΩ or RxC ≥100Ω-F whichever is smaller																																															
50V: 0402≥0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																
35V: 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																
16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																
<table border="1" style="width: 100%;"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: 1210≥3.3μF</td> <td rowspan="6" style="text-align: center; vertical-align: middle;">RxC ≥50Ω-F.</td> </tr> <tr> <td>50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF</td> </tr> <tr> <td>35V: 0603≥1μF</td> </tr> <tr> <td>25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF</td> </tr> <tr> <td>16V: 0201≥0.22μF; 0402≥1μF; 0603≥10μF</td> </tr> <tr> <td>10V: 0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF</td> </tr> </tbody> </table>			RATED VOLTAGE	INSULATION RESISTANCE	100V: 1210≥3.3μF	RxC ≥50Ω-F.	50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF	35V: 0603≥1μF	25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF	16V: 0201≥0.22μF; 0402≥1μF; 0603≥10μF	10V: 0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF																																					
RATED VOLTAGE	INSULATION RESISTANCE																																															
100V: 1210≥3.3μF	RxC ≥50Ω-F.																																															
50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF																																																
35V: 0603≥1μF																																																
25V: 0201≥0.1μF; 0402≥2.2μF; 0603≥10μF; 0805≥10μF; 1206≥22μF																																																
16V: 0201≥0.22μF; 0402≥1μF; 0603≥10μF																																																
10V: 0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥47μF																																																

RELIABILITY TEST CONDITIONS & REQUIREMENTS

ITEM	AEC-Q200 TEST CONDITION	REQUIREMENTS																																																															
15. Thermal Shock MIL-STD-202 Method 107	* Conduct 300 cycles according to the temperatures and time.	* No remarkable damage. * Cap change: NPO: within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ whichever is larger. X7R: within $\pm 10\%$ *Q/D.F. value: NPO: Cap $\geq 30\text{pF}$, Q ≥ 1000 ; Cap $< 30\text{pF}$, Q $\geq 400+20\text{C}$. X7R:																																																															
	<table border="1"> <thead> <tr> <th>STEP</th> <th>TEMP. (°C)</th> <th>TIME (MIN.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-55°C +0/-3</td> <td>15±3</td> </tr> <tr> <td>2</td> <td>+125°C +3/-0</td> <td>15±3</td> </tr> </tbody> </table> <p>* Before initial measurement (X7R only): Perform 150+0/-10°C for 1hr and then set for 24±2 hrs at room temp.</p> <p>* Measurement to be made after keeping at room temp. for 24±2 hrs.</p> <p>* Max. transfer time: 20 sec.</p>		STEP	TEMP. (°C)	TIME (MIN.)	1	-55°C +0/-3	15±3	2	+125°C +3/-0	15±3	<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>D.F. \leq</th> <th colspan="2">EXCEPTION OF D.F. \leq</th> </tr> </thead> <tbody> <tr> <td rowspan="3">$\geq 100\text{V}$</td> <td rowspan="3">$\leq 3\%$</td> <td>$\leq 6\%$</td> <td>1206$\geq 0.47\mu\text{F}$</td> </tr> <tr> <td>$\leq 7.5\%$</td> <td>0603$\geq 0.068\mu\text{F}$; 0805$> 0.1\mu\text{F}$; 1206$\geq 1\mu\text{F}$; 1210$\geq 2.2\mu\text{F}$</td> </tr> <tr> <td>$\leq 20\%$</td> <td>0805$> 0.22\mu\text{F}$; 1210$\geq 3.3\mu\text{F}$</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">$\leq 3\%$</td> <td>$\leq 6\%$</td> <td>0201(50V): 0603$\geq 0.047\mu\text{F}$; 0805$\geq 0.18\mu\text{F}$; 1206$\geq 0.47\mu\text{F}$</td> </tr> <tr> <td>$\leq 10\%$</td> <td>0201$\geq 0.01\mu\text{F}$; 1210$\geq 3.3\mu\text{F}$</td> </tr> <tr> <td>$\leq 20\%$</td> <td>0402$\geq 0.012\mu\text{F}$; 0603$\geq 0.1\mu\text{F}$; 0805$\geq 0.47\mu\text{F}$; 1206$\geq 2.2\mu\text{F}$; 1210$\geq 10\mu\text{F}$</td> </tr> <tr> <td>35V</td> <td>$\leq 5\%$</td> <td>$\leq 20\%$</td> <td>0603$\geq 1\mu\text{F}$; 0805$\geq 2.2\mu\text{F}$; 1206$\geq 2.2\mu\text{F}$; 1210$\geq 10\mu\text{F}$</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">$\leq 5\%$</td> <td>$\leq 10\%$</td> <td>0201$\geq 0.01\mu\text{F}$; 0805$\geq 1\mu\text{F}$; 1210$\geq 10\mu\text{F}$</td> </tr> <tr> <td>$\leq 14\%$</td> <td>0603$\geq 0.33\mu\text{F}$</td> </tr> <tr> <td>$\leq 15\%$</td> <td>0201$\geq 0.1\mu\text{F}$; 0402$\geq 0.056\mu\text{F}$; 0603$\geq 0.47\mu\text{F}$; 0805$\geq 2.2\mu\text{F}$; 1206$\geq 4.7\mu\text{F}$; 1210$\geq 22\mu\text{F}$</td> </tr> <tr> <td>$\leq 20\%$</td> <td>0402$\geq 0.47\mu\text{F}$</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">$\leq 5\%$</td> <td>$\leq 10\%$</td> <td>0603$\geq 0.15\mu\text{F}$; 0805$\geq 0.68\mu\text{F}$; 1206$\geq 2.2\mu\text{F}$; 1210$\geq 4.7\mu\text{F}$</td> </tr> <tr> <td>$\leq 15\%$</td> <td>0201$\geq 0.022\mu\text{F}$; 0402$\geq 0.033\mu\text{F}$; 0603$\geq 0.47\mu\text{F}$; 0805$\geq 2.2\mu\text{F}$; 1206$\geq 4.7\mu\text{F}$; 1210$\geq 22\mu\text{F}$</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">$\leq 7.5\%$</td> <td>$\leq 15\%$</td> <td>0201$\geq 0.012\mu\text{F}$; 0402$\geq 0.15\mu\text{F}$; 0603$\geq 0.33\mu\text{F}$; 0805$\geq 2.2\mu\text{F}$; 1206$\geq 2.2\mu\text{F}$; 1210$\geq 22\mu\text{F}$</td> </tr> <tr> <td>$\leq 20\%$</td> <td>0201$\geq 0.1\mu\text{F}$; 0402$\geq 1\mu\text{F}$</td> </tr> </tbody> </table> <p>* I.R.: $\geq 10\text{G}\Omega$ or RxC$\geq 500\Omega\text{-F}$ whichever is smaller Class II (X7R)</p> <table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R; 1210$\geq 3.3\mu\text{F}$</td> <td rowspan="6">1GΩ or RxC $\geq 10\Omega\text{-F}$ whichever is smaller</td> </tr> <tr> <td>50V: 0402$\geq 0.01\mu\text{F}$; 0603$\geq 1\mu\text{F}$; 0805$\geq 1\mu\text{F}$; 1206$\geq 4.7\mu\text{F}$; 1210$\geq 4.7\mu\text{F}$</td> </tr> <tr> <td>35V: 0603$\geq 1\mu\text{F}$; 0805$\geq 2.2\mu\text{F}$; 1206$\geq 2.2\mu\text{F}$; 1210$\geq 10\mu\text{F}$</td> </tr> <tr> <td>25V: 0201$\geq 0.1\mu\text{F}$; 0402$\geq 0.22\mu\text{F}$; 0603$\geq 2.2\mu\text{F}$; 0805$\geq 2.2\mu\text{F}$; 1206$\geq 10\mu\text{F}$; 1210$\geq 10\mu\text{F}$</td> </tr> <tr> <td>16V: 0201$\geq 0.1\mu\text{F}$; 0402$\geq 0.22\mu\text{F}$; 0603$\geq 1\mu\text{F}$; 0805$\geq 2.2\mu\text{F}$; 1206$\geq 10\mu\text{F}$; 1210$\geq 47\mu\text{F}$</td> </tr> <tr> <td>10V: 0201$\geq 47\text{nF}$; 0402$\geq 0.47\mu\text{F}$; 0603$\geq 0.47\mu\text{F}$; 0805$\geq 2.2\mu\text{F}$; 1206$\geq 4.7\mu\text{F}$; 1210$\geq 47\mu\text{F}$</td> </tr> </tbody> </table>	RATED VOLTAGE	D.F. \leq	EXCEPTION OF D.F. \leq		$\geq 100\text{V}$	$\leq 3\%$	$\leq 6\%$	1206 $\geq 0.47\mu\text{F}$	$\leq 7.5\%$	0603 $\geq 0.068\mu\text{F}$; 0805 $> 0.1\mu\text{F}$; 1206 $\geq 1\mu\text{F}$; 1210 $\geq 2.2\mu\text{F}$	$\leq 20\%$	0805 $> 0.22\mu\text{F}$; 1210 $\geq 3.3\mu\text{F}$	50V	$\leq 3\%$	$\leq 6\%$	0201(50V): 0603 $\geq 0.047\mu\text{F}$; 0805 $\geq 0.18\mu\text{F}$; 1206 $\geq 0.47\mu\text{F}$	$\leq 10\%$	0201 $\geq 0.01\mu\text{F}$; 1210 $\geq 3.3\mu\text{F}$	$\leq 20\%$	0402 $\geq 0.012\mu\text{F}$; 0603 $\geq 0.1\mu\text{F}$; 0805 $\geq 0.47\mu\text{F}$; 1206 $\geq 2.2\mu\text{F}$; 1210 $\geq 10\mu\text{F}$	35V	$\leq 5\%$	$\leq 20\%$	0603 $\geq 1\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 2.2\mu\text{F}$; 1210 $\geq 10\mu\text{F}$	25V	$\leq 5\%$	$\leq 10\%$	0201 $\geq 0.01\mu\text{F}$; 0805 $\geq 1\mu\text{F}$; 1210 $\geq 10\mu\text{F}$	$\leq 14\%$	0603 $\geq 0.33\mu\text{F}$	$\leq 15\%$	0201 $\geq 0.1\mu\text{F}$; 0402 $\geq 0.056\mu\text{F}$; 0603 $\geq 0.47\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 4.7\mu\text{F}$; 1210 $\geq 22\mu\text{F}$	$\leq 20\%$	0402 $\geq 0.47\mu\text{F}$	16V	$\leq 5\%$	$\leq 10\%$	0603 $\geq 0.15\mu\text{F}$; 0805 $\geq 0.68\mu\text{F}$; 1206 $\geq 2.2\mu\text{F}$; 1210 $\geq 4.7\mu\text{F}$	$\leq 15\%$	0201 $\geq 0.022\mu\text{F}$; 0402 $\geq 0.033\mu\text{F}$; 0603 $\geq 0.47\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 4.7\mu\text{F}$; 1210 $\geq 22\mu\text{F}$	10V	$\leq 7.5\%$	$\leq 15\%$	0201 $\geq 0.012\mu\text{F}$; 0402 $\geq 0.15\mu\text{F}$; 0603 $\geq 0.33\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 2.2\mu\text{F}$; 1210 $\geq 22\mu\text{F}$	$\leq 20\%$	0201 $\geq 0.1\mu\text{F}$; 0402 $\geq 1\mu\text{F}$	RATED VOLTAGE	INSULATION RESISTANCE	100V: All X7R; 1210 $\geq 3.3\mu\text{F}$	1G Ω or RxC $\geq 10\Omega\text{-F}$ whichever is smaller	50V: 0402 $\geq 0.01\mu\text{F}$; 0603 $\geq 1\mu\text{F}$; 0805 $\geq 1\mu\text{F}$; 1206 $\geq 4.7\mu\text{F}$; 1210 $\geq 4.7\mu\text{F}$	35V: 0603 $\geq 1\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 2.2\mu\text{F}$; 1210 $\geq 10\mu\text{F}$	25V: 0201 $\geq 0.1\mu\text{F}$; 0402 $\geq 0.22\mu\text{F}$; 0603 $\geq 2.2\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 10\mu\text{F}$; 1210 $\geq 10\mu\text{F}$
STEP	TEMP. (°C)	TIME (MIN.)																																																															
1	-55°C +0/-3	15±3																																																															
2	+125°C +3/-0	15±3																																																															
RATED VOLTAGE	D.F. \leq	EXCEPTION OF D.F. \leq																																																															
$\geq 100\text{V}$	$\leq 3\%$	$\leq 6\%$	1206 $\geq 0.47\mu\text{F}$																																																														
		$\leq 7.5\%$	0603 $\geq 0.068\mu\text{F}$; 0805 $> 0.1\mu\text{F}$; 1206 $\geq 1\mu\text{F}$; 1210 $\geq 2.2\mu\text{F}$																																																														
		$\leq 20\%$	0805 $> 0.22\mu\text{F}$; 1210 $\geq 3.3\mu\text{F}$																																																														
50V	$\leq 3\%$	$\leq 6\%$	0201(50V): 0603 $\geq 0.047\mu\text{F}$; 0805 $\geq 0.18\mu\text{F}$; 1206 $\geq 0.47\mu\text{F}$																																																														
		$\leq 10\%$	0201 $\geq 0.01\mu\text{F}$; 1210 $\geq 3.3\mu\text{F}$																																																														
		$\leq 20\%$	0402 $\geq 0.012\mu\text{F}$; 0603 $\geq 0.1\mu\text{F}$; 0805 $\geq 0.47\mu\text{F}$; 1206 $\geq 2.2\mu\text{F}$; 1210 $\geq 10\mu\text{F}$																																																														
35V	$\leq 5\%$	$\leq 20\%$	0603 $\geq 1\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 2.2\mu\text{F}$; 1210 $\geq 10\mu\text{F}$																																																														
25V	$\leq 5\%$	$\leq 10\%$	0201 $\geq 0.01\mu\text{F}$; 0805 $\geq 1\mu\text{F}$; 1210 $\geq 10\mu\text{F}$																																																														
		$\leq 14\%$	0603 $\geq 0.33\mu\text{F}$																																																														
		$\leq 15\%$	0201 $\geq 0.1\mu\text{F}$; 0402 $\geq 0.056\mu\text{F}$; 0603 $\geq 0.47\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 4.7\mu\text{F}$; 1210 $\geq 22\mu\text{F}$																																																														
		$\leq 20\%$	0402 $\geq 0.47\mu\text{F}$																																																														
16V	$\leq 5\%$	$\leq 10\%$	0603 $\geq 0.15\mu\text{F}$; 0805 $\geq 0.68\mu\text{F}$; 1206 $\geq 2.2\mu\text{F}$; 1210 $\geq 4.7\mu\text{F}$																																																														
		$\leq 15\%$	0201 $\geq 0.022\mu\text{F}$; 0402 $\geq 0.033\mu\text{F}$; 0603 $\geq 0.47\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 4.7\mu\text{F}$; 1210 $\geq 22\mu\text{F}$																																																														
10V	$\leq 7.5\%$	$\leq 15\%$	0201 $\geq 0.012\mu\text{F}$; 0402 $\geq 0.15\mu\text{F}$; 0603 $\geq 0.33\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 2.2\mu\text{F}$; 1210 $\geq 22\mu\text{F}$																																																														
		$\leq 20\%$	0201 $\geq 0.1\mu\text{F}$; 0402 $\geq 1\mu\text{F}$																																																														
RATED VOLTAGE	INSULATION RESISTANCE																																																																
100V: All X7R; 1210 $\geq 3.3\mu\text{F}$	1G Ω or RxC $\geq 10\Omega\text{-F}$ whichever is smaller																																																																
50V: 0402 $\geq 0.01\mu\text{F}$; 0603 $\geq 1\mu\text{F}$; 0805 $\geq 1\mu\text{F}$; 1206 $\geq 4.7\mu\text{F}$; 1210 $\geq 4.7\mu\text{F}$																																																																	
35V: 0603 $\geq 1\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 2.2\mu\text{F}$; 1210 $\geq 10\mu\text{F}$																																																																	
25V: 0201 $\geq 0.1\mu\text{F}$; 0402 $\geq 0.22\mu\text{F}$; 0603 $\geq 2.2\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 10\mu\text{F}$; 1210 $\geq 10\mu\text{F}$																																																																	
16V: 0201 $\geq 0.1\mu\text{F}$; 0402 $\geq 0.22\mu\text{F}$; 0603 $\geq 1\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 10\mu\text{F}$; 1210 $\geq 47\mu\text{F}$																																																																	
10V: 0201 $\geq 47\text{nF}$; 0402 $\geq 0.47\mu\text{F}$; 0603 $\geq 0.47\mu\text{F}$; 0805 $\geq 2.2\mu\text{F}$; 1206 $\geq 4.7\mu\text{F}$; 1210 $\geq 47\mu\text{F}$																																																																	
16. Solderability J-STD-002 JESD22-B102E	* Condition A Un-mounted chips 4hrs/155°C* dry then completely immersed for 5±.5 sec in solder bath at 235±5°C. * Condition B Un-mounted chips steam 8hrs then completely immersed for 10±1 sec in solder bath at 215±5/-0°C. * Condition C Un-mounted chips steam 8hrs then completely immersed for 10±1 sec in solder bath at 260±0/-5°C.	* All terminations shall exhibit a continuous solder coating free from defects from a minimum of 95% of the critical surface area of any individual termination.																																																															



RELIABILITY TEST CONDITIONS & REQUIREMENTS

ITEM	AEC-Q200 TEST CONDITION	REQUIREMENTS																																																																
17. ESD AEC-Q200-002	* Per AEC-Q200-002	<p>* No remarkable damage. * Cap. change: within the specified tolerance. * Q/D.F. value: NPO: Cap\geq30pF, Q\geq1000; Cap$<$30pF, Q\geq400+20C. X7R:</p> <table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>D.F. \leq</th> <th colspan="2">EXCEPTION OF D.F. \leq</th> </tr> </thead> <tbody> <tr> <td rowspan="3">\geq100V</td> <td rowspan="3">\leq2.5%</td> <td>\leq3%</td> <td>1206\geq0.47μF</td> </tr> <tr> <td>\leq5%</td> <td>0603\geq0.068μF; 0805$>$0.1μF; 1206\geq1μF; 1210\geq2.2μF</td> </tr> <tr> <td>\leq10%</td> <td>0805$>$0.22μF; 1210\geq3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">\leq2.5%</td> <td>\leq3%</td> <td>0201(50V): 0603\geq0.047μF; 0805\geq0.18μF; 1206\geq0.47μF</td> </tr> <tr> <td>\leq5%</td> <td>0201\geq0.01μF; 1210\geq3.3μF</td> </tr> <tr> <td>\leq10%</td> <td>0402\geq0.012μF; 0603\geq0.1μF; 0805\geq0.47μF; 1206\geq2.2μF; 1210\geq10μF</td> </tr> <tr> <td>35V</td> <td>\leq3.5%</td> <td>\leq10%</td> <td>0603\geq1μF; 0805\geq2.2μF; 1206\geq2.2μF; 1210\geq10μF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">\leq3.5%</td> <td>\leq5%</td> <td>0201\geq0.01μF; 0805\geq1μF; 1210\geq10μF</td> </tr> <tr> <td>\leq7%</td> <td>0603\geq0.33μF</td> </tr> <tr> <td>\leq10%</td> <td>0201\geq0.1μF; 0402\geq0.056μF; 0603\geq0.47μF; 0805\geq2.2μF; 1206\geq4.7μF; 1210\geq22μF</td> </tr> <tr> <td>\leq12.5%</td> <td>0402\geq0.47μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">\leq3.5%</td> <td>\leq5%</td> <td>0201\geq0.01μF; 0402\geq0.033μF; 0603\geq0.15μF; 0805\geq0.68μF; 1206\geq2.2μF; 1210\geq4.7μF</td> </tr> <tr> <td>\leq10%</td> <td>0201\geq0.022μF; 0402\geq0.15μF; 0603\geq0.47μF; 0805\geq2.2μF; 1206\geq4.7μF; 1210\geq22μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">\leq5%</td> <td>\leq10%</td> <td>0201\geq0.012μF; 0402\geq0.15μF; 0603\geq0.33μF; 0805\geq2.2μF; 1206\geq2.2μF; 1210\geq22μF</td> </tr> <tr> <td>\leq15%</td> <td>0201\geq0.1μF; 0402\geq1μF</td> </tr> </tbody> </table> <p>* I.R.: \geq 10GΩ or RxC\geq500Ω-F whichever is smaller Class II (X7R)</p> <table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R</td> <td rowspan="6">10GΩ or RxC \geq100Ω-F whichever is smaller</td> </tr> <tr> <td>50V: 0402\geq0.01μF; 0603\geq1μF; 0805\geq1μF; 1206\geq4.7μF; 1210\geq4.7μF</td> </tr> <tr> <td>35V: 0805\geq2.2μF; 1206\geq2.2μF; 1210\geq10μF</td> </tr> <tr> <td>25V: 0402\geq1μF; 0603\geq2.2μF; 0805\geq2.2μF; 1206\geq10μF; 1210\geq10μF</td> </tr> <tr> <td>16V: 0201\geq0.1μF; 0402\geq0.22μF; 0603\geq1μF; 0805\geq2.2μF; 1206\geq10μF; 1210\geq47μF</td> </tr> <tr> <td>10V: 0201\geq47nF; 0402\geq0.47μF; 0603\geq0.47μF; 0805\geq2.2μF; 1206\geq4.7μF; 1210\geq47μF</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>INSULATION RESISTANCE</th> </tr> </thead> <tbody> <tr> <td>100V: 1210\geq3.3μF</td> <td rowspan="6">Rx C \geq50Ω-F.</td> </tr> <tr> <td>50V: 0402\geq0.1μF; 0603\geq2.2μF; 0805\geq10μF; 1206\geq10μF</td> </tr> <tr> <td>35V: 0603\geq1μF</td> </tr> <tr> <td>25V: 0201\geq0.1μF; 0402\geq2.2μF; 0603\geq10μF; 0805\geq10μF; 1206\geq22μF</td> </tr> <tr> <td>16V: 0201\geq0.22μF; 0402\geq1μF; 0603\geq10μF</td> </tr> <tr> <td>10V: 0201\geq0.1μF; 0402\geq1μF; 0603\geq10μF; 0805\geq47μF</td> </tr> </tbody> </table>	RATED VOLTAGE	D.F. \leq	EXCEPTION OF D.F. \leq		\geq 100V	\leq 2.5%	\leq 3%	1206 \geq 0.47 μ F	\leq 5%	0603 \geq 0.068 μ F; 0805 $>$ 0.1 μ F; 1206 \geq 1 μ F; 1210 \geq 2.2 μ F	\leq 10%	0805 $>$ 0.22 μ F; 1210 \geq 3.3 μ F	50V	\leq 2.5%	\leq 3%	0201(50V): 0603 \geq 0.047 μ F; 0805 \geq 0.18 μ F; 1206 \geq 0.47 μ F	\leq 5%	0201 \geq 0.01 μ F; 1210 \geq 3.3 μ F	\leq 10%	0402 \geq 0.012 μ F; 0603 \geq 0.1 μ F; 0805 \geq 0.47 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F	35V	\leq 3.5%	\leq 10%	0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F	25V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0805 \geq 1 μ F; 1210 \geq 10 μ F	\leq 7%	0603 \geq 0.33 μ F	\leq 10%	0201 \geq 0.1 μ F; 0402 \geq 0.056 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F	\leq 12.5%	0402 \geq 0.47 μ F	16V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0402 \geq 0.033 μ F; 0603 \geq 0.15 μ F; 0805 \geq 0.68 μ F; 1206 \geq 2.2 μ F; 1210 \geq 4.7 μ F	\leq 10%	0201 \geq 0.022 μ F; 0402 \geq 0.15 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F	10V	\leq 5%	\leq 10%	0201 \geq 0.012 μ F; 0402 \geq 0.15 μ F; 0603 \geq 0.33 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 22 μ F	\leq 15%	0201 \geq 0.1 μ F; 0402 \geq 1 μ F	RATED VOLTAGE	INSULATION RESISTANCE	100V: All X7R	10G Ω or RxC \geq 100 Ω -F whichever is smaller	50V: 0402 \geq 0.01 μ F; 0603 \geq 1 μ F; 0805 \geq 1 μ F; 1206 \geq 4.7 μ F; 1210 \geq 4.7 μ F	35V: 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F	25V: 0402 \geq 1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 2.2 μ F; 1206 \geq 10 μ F; 1210 \geq 10 μ F	16V: 0201 \geq 0.1 μ F; 0402 \geq 0.22 μ F; 0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1206 \geq 10 μ F; 1210 \geq 47 μ F	10V: 0201 \geq 47nF; 0402 \geq 0.47 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 47 μ F	RATED VOLTAGE	INSULATION RESISTANCE	100V: 1210 \geq 3.3 μ F	Rx C \geq 50 Ω -F.	50V: 0402 \geq 0.1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 10 μ F; 1206 \geq 10 μ F	35V: 0603 \geq 1 μ F	25V: 0201 \geq 0.1 μ F; 0402 \geq 2.2 μ F; 0603 \geq 10 μ F; 0805 \geq 10 μ F; 1206 \geq 22 μ F	16V: 0201 \geq 0.22 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F	10V: 0201 \geq 0.1 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F; 0805 \geq 47 μ F
RATED VOLTAGE	D.F. \leq	EXCEPTION OF D.F. \leq																																																																
\geq 100V	\leq 2.5%	\leq 3%	1206 \geq 0.47 μ F																																																															
		\leq 5%	0603 \geq 0.068 μ F; 0805 $>$ 0.1 μ F; 1206 \geq 1 μ F; 1210 \geq 2.2 μ F																																																															
		\leq 10%	0805 $>$ 0.22 μ F; 1210 \geq 3.3 μ F																																																															
50V	\leq 2.5%	\leq 3%	0201(50V): 0603 \geq 0.047 μ F; 0805 \geq 0.18 μ F; 1206 \geq 0.47 μ F																																																															
		\leq 5%	0201 \geq 0.01 μ F; 1210 \geq 3.3 μ F																																																															
		\leq 10%	0402 \geq 0.012 μ F; 0603 \geq 0.1 μ F; 0805 \geq 0.47 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F																																																															
35V	\leq 3.5%	\leq 10%	0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F																																																															
25V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0805 \geq 1 μ F; 1210 \geq 10 μ F																																																															
		\leq 7%	0603 \geq 0.33 μ F																																																															
		\leq 10%	0201 \geq 0.1 μ F; 0402 \geq 0.056 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F																																																															
		\leq 12.5%	0402 \geq 0.47 μ F																																																															
16V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0402 \geq 0.033 μ F; 0603 \geq 0.15 μ F; 0805 \geq 0.68 μ F; 1206 \geq 2.2 μ F; 1210 \geq 4.7 μ F																																																															
		\leq 10%	0201 \geq 0.022 μ F; 0402 \geq 0.15 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F																																																															
10V	\leq 5%	\leq 10%	0201 \geq 0.012 μ F; 0402 \geq 0.15 μ F; 0603 \geq 0.33 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 22 μ F																																																															
		\leq 15%	0201 \geq 0.1 μ F; 0402 \geq 1 μ F																																																															
RATED VOLTAGE	INSULATION RESISTANCE																																																																	
100V: All X7R	10G Ω or RxC \geq 100 Ω -F whichever is smaller																																																																	
50V: 0402 \geq 0.01 μ F; 0603 \geq 1 μ F; 0805 \geq 1 μ F; 1206 \geq 4.7 μ F; 1210 \geq 4.7 μ F																																																																		
35V: 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F																																																																		
25V: 0402 \geq 1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 2.2 μ F; 1206 \geq 10 μ F; 1210 \geq 10 μ F																																																																		
16V: 0201 \geq 0.1 μ F; 0402 \geq 0.22 μ F; 0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1206 \geq 10 μ F; 1210 \geq 47 μ F																																																																		
10V: 0201 \geq 47nF; 0402 \geq 0.47 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 47 μ F																																																																		
RATED VOLTAGE	INSULATION RESISTANCE																																																																	
100V: 1210 \geq 3.3 μ F	Rx C \geq 50 Ω -F.																																																																	
50V: 0402 \geq 0.1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 10 μ F; 1206 \geq 10 μ F																																																																		
35V: 0603 \geq 1 μ F																																																																		
25V: 0201 \geq 0.1 μ F; 0402 \geq 2.2 μ F; 0603 \geq 10 μ F; 0805 \geq 10 μ F; 1206 \geq 22 μ F																																																																		
16V: 0201 \geq 0.22 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F																																																																		
10V: 0201 \geq 0.1 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F; 0805 \geq 47 μ F																																																																		

RELIABILITY TEST CONDITIONS & REQUIREMENTS

ITEM	AEC-Q200 TEST CONDITION	REQUIREMENTS																																														
18. Terminal Strength AEC-Q200-006	* Pressurizing force: 2N (0201 & 0402), 10N(0603), 18N(≥0805). * Test time: 60±1 sec.	* No remarkable damage or removal of the terminations. * Capacitance within the specified tolerance. * Q/D.F. value: NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C. X7R: <table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>D.F. ≤</th> <th colspan="2">EXCEPTION OF D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">≥100V</td> <td rowspan="3">≤2.5%</td> <td>≤3%</td> <td>1206≥0.47μF</td> </tr> <tr> <td>≤5%</td> <td>0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF</td> </tr> <tr> <td>≤10%</td> <td>0805>0.22μF; 1210≥3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤2.5%</td> <td>≤3%</td> <td>0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td> </tr> <tr> <td>≤5%</td> <td>0201≥0.01μF; 1210≥3.3μF</td> </tr> <tr> <td>≤10%</td> <td>0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>35V</td> <td>≤3.5%</td> <td>≤10%</td> <td>0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤3.5%</td> <td>≤5%</td> <td>0201≥0.01μF; 0805≥1μF; 1210≥10μF</td> </tr> <tr> <td>≤7%</td> <td>0603≥0.33μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td>≤12.5%</td> <td>0402≥0.47μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤3.5%</td> <td>≤5%</td> <td>0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.022μF; 0402≥0.15μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.1μF; 0402≥1μF</td> </tr> </tbody> </table>	RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤		≥100V	≤2.5%	≤3%	1206≥0.47μF	≤5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF	≤10%	0805>0.22μF; 1210≥3.3μF	50V	≤2.5%	≤3%	0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	≤5%	0201≥0.01μF; 1210≥3.3μF	≤10%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF	35V	≤3.5%	≤10%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V	≤3.5%	≤5%	0201≥0.01μF; 0805≥1μF; 1210≥10μF	≤7%	0603≥0.33μF	≤10%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	≤12.5%	0402≥0.47μF	16V	≤3.5%	≤5%	0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	≤10%	0201≥0.022μF; 0402≥0.15μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	10V	≤5%	≤10%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤15%	0201≥0.1μF; 0402≥1μF
RATED VOLTAGE	D.F. ≤	EXCEPTION OF D.F. ≤																																														
≥100V	≤2.5%	≤3%	1206≥0.47μF																																													
		≤5%	0603≥0.068μF; 0805>0.1μF; 1206≥1μF; 1210≥2.2μF																																													
		≤10%	0805>0.22μF; 1210≥3.3μF																																													
50V	≤2.5%	≤3%	0201(50V): 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																													
		≤5%	0201≥0.01μF; 1210≥3.3μF																																													
		≤10%	0402≥0.012μF; 0603≥0.1μF; 0805≥0.47μF; 1206≥2.2μF; 1210≥10μF																																													
35V	≤3.5%	≤10%	0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																													
25V	≤3.5%	≤5%	0201≥0.01μF; 0805≥1μF; 1210≥10μF																																													
		≤7%	0603≥0.33μF																																													
		≤10%	0201≥0.1μF; 0402≥0.056μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
		≤12.5%	0402≥0.47μF																																													
16V	≤3.5%	≤5%	0201≥0.01μF; 0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																													
		≤10%	0201≥0.022μF; 0402≥0.15μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																													
10V	≤5%	≤10%	0201≥0.012μF; 0402≥0.15μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																													
		≤15%	0201≥0.1μF; 0402≥1μF																																													
19. Board Flex AEC-Q200-005	* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 3mm (2mm for X7R) and then the pressure shall be maintained for 60±1 sec. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage * Cap change: NPO: within ±5% or ±0.5pF whichever is larger. X7R: within ±12.5% (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)																																														
20. Beam Load Test AEC-Q200-003	* Break strength test * Beam speed: 2.5±.25mm/sec	* The chip endures following force (1) Chip length ≤2.5mm: Thickness>0.5mm (20N), ≤0.5mm (8N) (2) Chip length ≥3.2mm: Thickness≥1.25mm (54.5N), <1.25mm (15N)																																														
21. Destructive Physical Analysis EIA-469	* Per EIA-469	* No defects or abnormalities.																																														


TAPE AND REEL SPECIFICATIONS

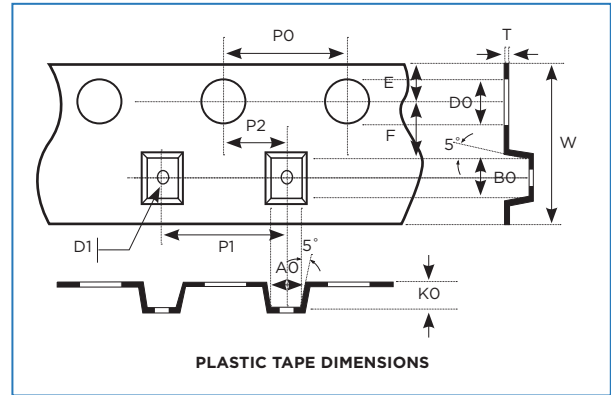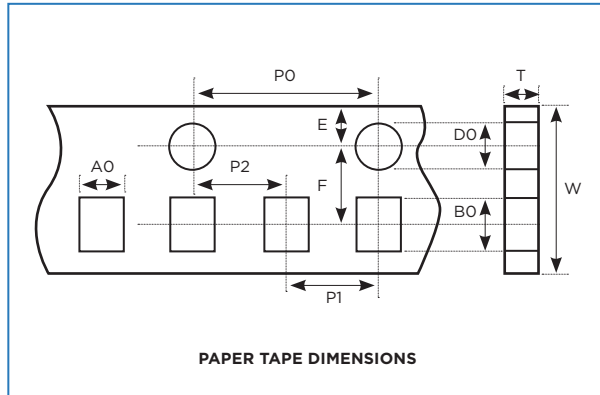

SIZE	0201	0402	0603	0805			1206			1210	
Thickness (mm)	0.30±0.03	0.50±0.05	0.80±0.07/ 0.80±0.15/-0.1	0.60±0.10	0.80±0.10	1.25±0.10/ 1.25±0.20	0.80±0.10	0.95±0.10/ 1.15±0.15/ 1.25±0.10	1.60±0.20/ 1.60±0.30/-0.1	0.95±0.10/ 1.25±0.10/ 1.60±0.20/ 2.00±0.20	2.50±0.30
A0	0.40±0.10	0.70±0.20	1.05±0.30	1.50±0.20	1.50±0.20	< 1.80	1.90±0.50	< 2.00	< 2.30	< 3.05	< 3.20
B0	0.70±0.10	1.20±0.20	1.80±0.30	2.30±0.20	2.30±0.20	< 2.70	3.50±0.50	< 3.70	< 4.00	< 3.80	< 4.00
T	≤0.55	≤0.80	≤1.20	≤1.15	≤1.20	0.23±0.1	≤1.20	0.23±0.1	0.23±0.1	0.23±0.1	0.23±0.1
K0	-	-	-	-	-	< 2.50	-	< 2.50	< 2.50	< 2.50	< 3.20
W	8.00±0.30	8.00±0.30	8.00±0.30	8.00±0.30	8.00±0.30	8.00±0.30	8.00±0.30	8.00±0.30	8.00±0.30	8.00±0.30	8.00±0.30
P0	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
P1	2.00±0.05	2.00±0.05	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
P2	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0
D1	-	-	-	-	-	1.00±0.10	-	1.00±0.10	1.00±0.10	1.00±0.10	1.00±0.10
E	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10
F	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05

SIZE	1812	1825	2220	2225
Thickness (mm)	1.25±0.20 1.60±0.20 2.00±0.20 2.40±0.20	1.25±0.20 1.60±0.20 2.00±0.20 2.40±0.20	1.25±0.20 1.60±0.20 2.00±0.20 2.40±0.20 3.20±0.20	1.25±0.20 1.60±0.20 2.00±0.20 2.40±0.20 2.80±0.20
A0	3.60±0.20	6.90±0.20	5.40±0.20	6.90±0.20
B0	4.90±0.20	4.90±0.20	6.10±0.20	6.10±0.20
T	≤0.30	≤0.30	≤0.30	≤0.30
K0	≤4.00	≤4.00	≤4.00	≤4.00
W	12.00±0.30	12.00±0.30	12.00±0.30	12.00±0.30
P0	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
P1	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10
P2	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0
D1	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10
E	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10
F	5.50±0.05	5.50±0.05	5.50±0.05	3.50±0.05

TAPE AND REEL SPECIFICATIONS

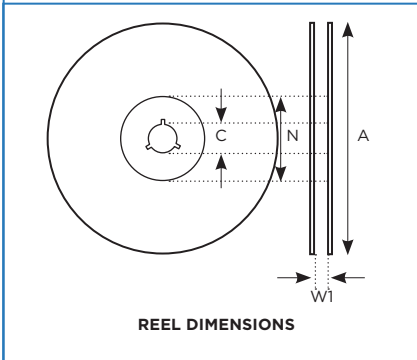

SIZE	0201, 0402, 0603, 0805, 1206, 1210	
Reel Size	7"	13"
C	13.0±0.5	13.0±0.5
W1	10.0±1.5	10.0±1.5
A	178.0±2.0	330.0±2.0
N	60.0+1.0/-0	50 min

SIZE	1812, 1825, 2220, 2225
Reel Size	7"
C	13.0±0.5
W1	13.0±0.3
A	178.0±2.0
N	60.0+1.0/-0

SIZE	THICKNESS	PAPER TAPE		PLASTIC TAPE	
		7" REEL	13" REEL	7" REEL	13" REEL
0201	0.30±0.03	15K	70K	-	-
0402	0.50±0.05	10K	50K	-	-
0603	0.80±0.07	4K	15K	-	-
	0.80+0.15/-0.1	4K	15K	-	-
0805	0.60±0.10	4K	15K	-	-
	0.80±0.10	4K	15K	-	-
	1.25±0.10	-	-	3K	10K
	1.25±0.20	-	-	3K	10K
1206	0.80±0.10	4K	15K	-	-
	0.95±0.10	-	-	3K	10K
	1.15±0.15	-	-	3K	10K
	1.25±0.10	-	-	3K	10K
	1.60±0.20	-	-	2K	10K
1210	1.60+0.30/-0.1	-	-	2K	9K
	0.95±0.10	-	-	3K	10K
	1.25±0.10	-	-	3K	10K
	1.60±0.20	-	-	2K	8K
	2.00±0.20	-	-	1K	6K
1812	2.50±0.30	-	-	1K	6K
	1.25±0.20	-	-	1K	N/A
	1.60±0.20	-	-	1K	N/A
	2.00±0.20	-	-	1K	N/A
1825	2.40±0.20	-	-	700	N/A
	1.25±0.20	-	-	700	N/A
	1.60±0.20	-	-	700	N/A
	2.00±0.20	-	-	700	N/A
2220	2.40±0.20	-	-	400	N/A
	1.25±0.20	-	-	1K	N/A
	1.60±0.20	-	-	1K	N/A
	2.00±0.20	-	-	1K	N/A
2225	2.40±0.20	-	-	700	N/A
	3.20±0.20	-	-	700	N/A
	1.25±0.20	-	-	700	N/A
	1.60±0.20	-	-	700	N/A
	2.00±0.20	-	-	700	N/A
2225	2.40±0.20	-	-	400	N/A
	2.80±0.20	-	-	400	N/A